

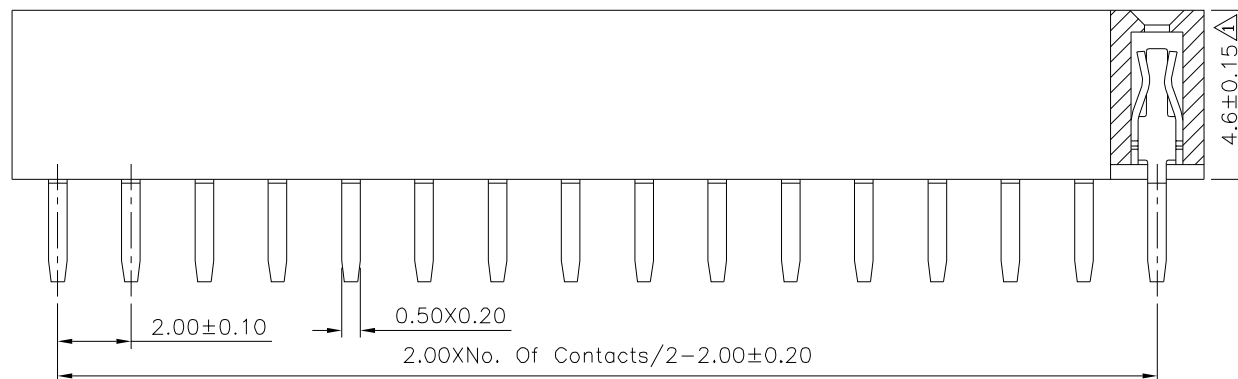


Recommended P.C.B. Layout

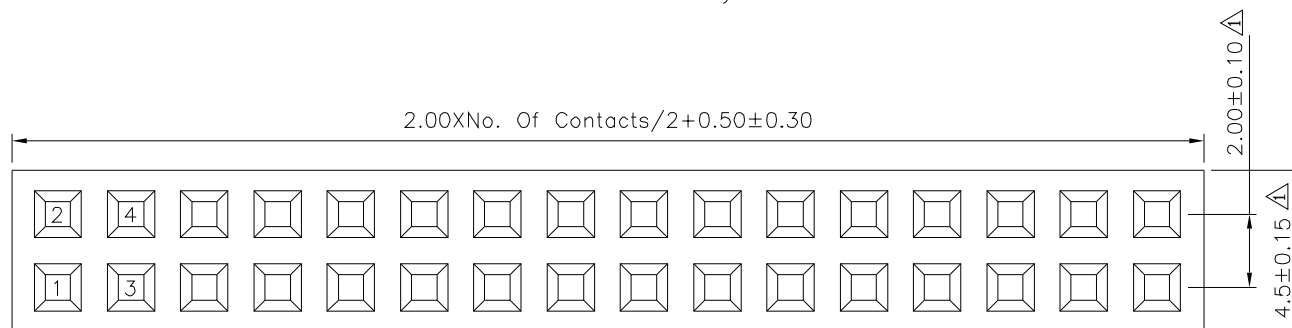

SPECIFICATION

Current Rating:1.5 Amp/Contact Max.
Withstand Voltage:450V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operation Temperature:-55°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

08771

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
.XXX ±0.10
ANG. ±5°

UNIT
mm



SCALE

NONE

REV.

A1

NO.

REV.

Modify Data

NEW RELEASE

REVISIONS

CHK

DATE

A1

A0

Modify Data

NEW RELEASE

REVISIONS

CHK

DATE

A1

A0

Modify Data

NEW RELEASE

REVISIONS

CHK

DATE