
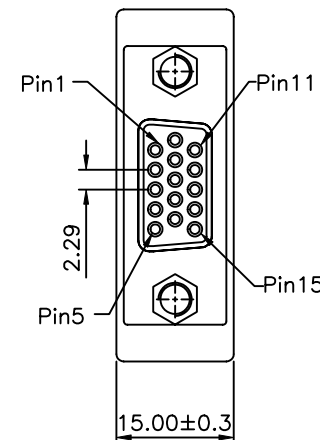




SPECIFICATION

- 100% Open/Short/Insulating Test
- Insulation Test:5 Megaohms
- RoHS Compliant

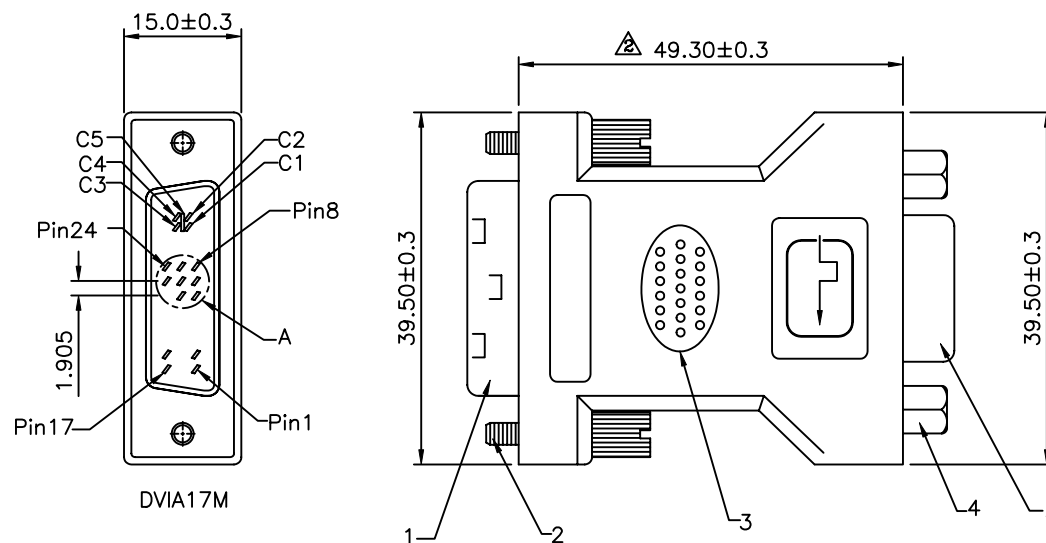


HD15F

Wire Diagram

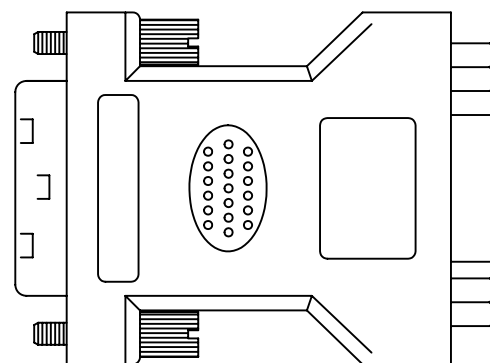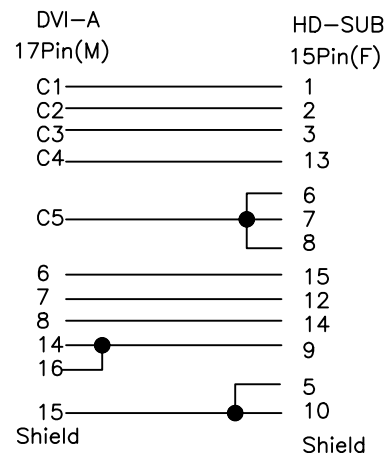

Back Side



Detail A

No.	Components	Description	Q'ty
1	DVI17M	DVI-Analog 17P Male Connector Insulator:High Temperature Plastic UL94V-0 Contact:Brass,G/F Selective Plated Shell:Steel With Nickel Plated Over	1
2	Jack Screw	4-#40UNC,Nickel Plated	2
3	Hood	PVC Molded Color:Black Inner Molded With Copper Foil Shielded	1
4	Screw Lock	4-#40UNC,Nickel Plated	2
5	HD15F	D-SUB High Density 2.29mm 15P Female Connector Shell:Steel,Nickel Plated Insulator:PBT,Black Contact:Brass,G/F Selective Plated	1

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

08883

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

XYH

REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38
.XX ±0.25

UNIT

mm



A2 Modify Data

A1 Modify P/N

A0 NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE

HZF

BECKY

04/18/2009

12/21/2004