File No.	689MD29804	SHEET	1/1

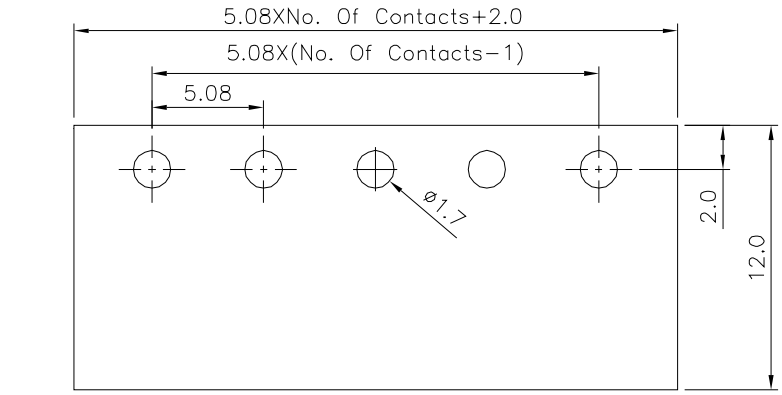

⚠1Recommended P.C.B. Layout

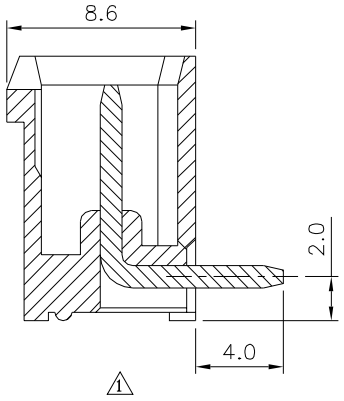

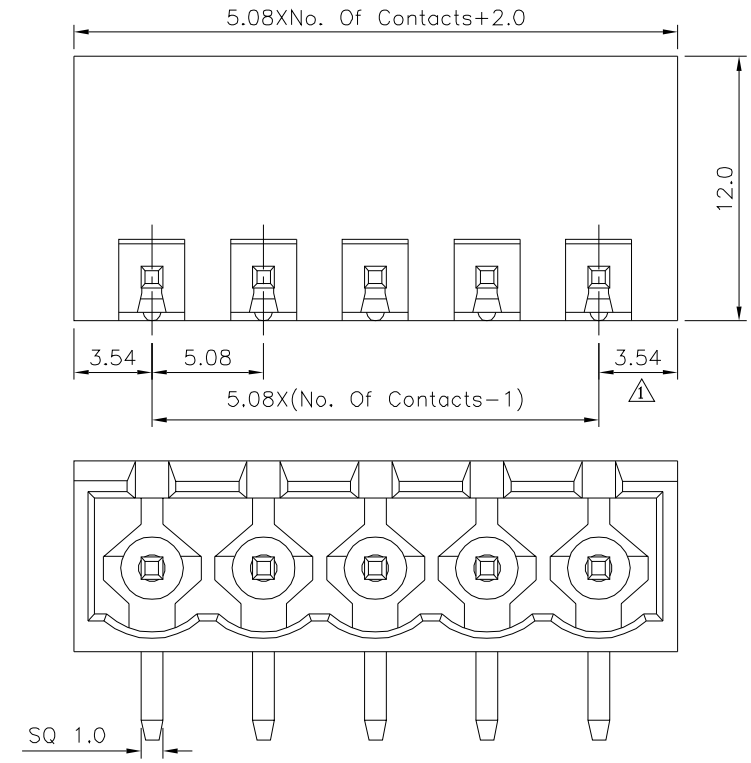

⚠1SPECIFICATION

Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Using Temperature Range:−40°C~+105°C
Soldering Temperature:+250°C,5s Max.
Insulator Body(Housing):Polyamide+G.F.(UL94V−0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No. ⚠2⚠3⚠4	09093		
APPROVED BY	MEI		
CHECKED BY	HZF		
DRAWING BY	CYP		
SCALE	NONE	REV.	A4

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
⚠1 X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
⚠4	A4	Modify Data	HZF	04/29/2022
⚠3	A3	Modify Data	HZF	12/10/2015
⚠2	A2	Modify Data	HZF	06/16/2015
⚠1	A1	Modify Data	HZF	08/29/2013
⚠0	A0	NEW RELEASE	HZF	12/04/2009