

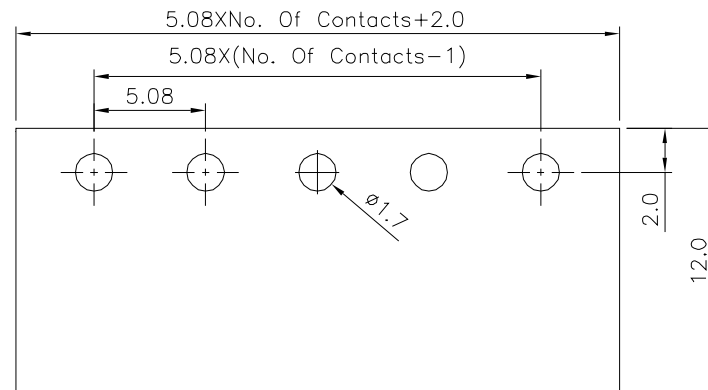
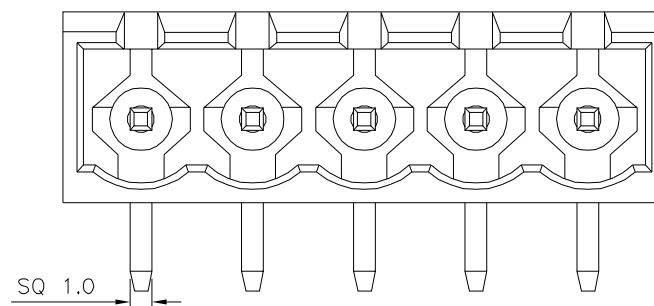


△ SPECIFICATION

Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Using Temperature Range:-40°C~+105°C
Soldering Temperature:+250°C,5s Max.
Insulator Body(Housing):Polyamide+G.F.(UL94V-0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

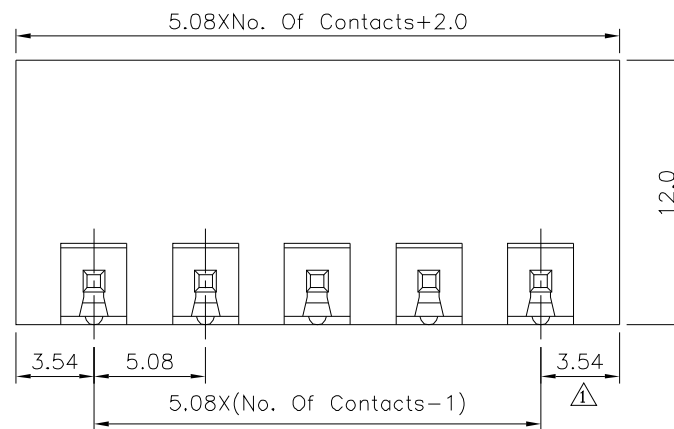

△ Recommended P.C.B. Layout

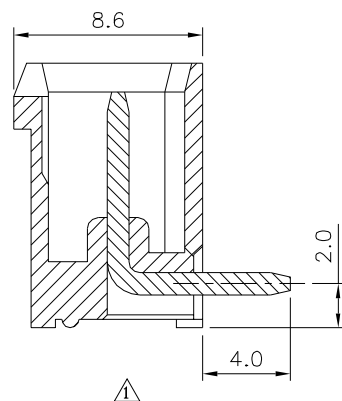

DRAWING No. △△△

APPROVED BY MEI

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

△ A4	Modify Data	HZF	04/29/2022
------	-------------	-----	------------

09095

CHECKED BY HZF

△ X. ± 0.50
.X ± 0.30
.XX ± 0.20
ANG. $\pm 1^\circ$

△ A3	Modify Data	HZF	12/10/2015
------	-------------	-----	------------

DRAWING BY CYP

UNIT mm

△ A2	Modify Data	HZF	06/16/2015
------	-------------	-----	------------

SCALE NONE

REV. A4

NO. REV.

△ A1	Modify Data	HZF	08/29/2013
------	-------------	-----	------------

SCALE NONE

REV. A4

UNIT mm

△ A0	NEW RELEASE	HZF	12/04/2009
------	-------------	-----	------------

SCALE NONE

REV. A4

UNIT mm

NO. REV.	REVISIONS	CHK	DATE
----------	-----------	-----	------

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.