
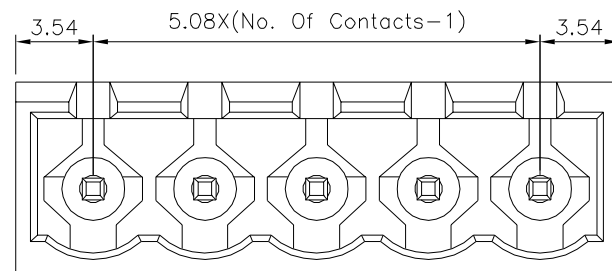
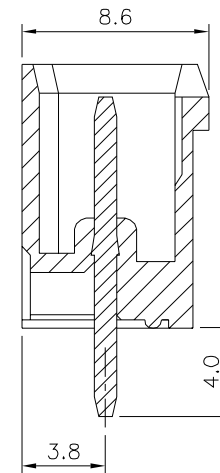


Recommended P.C.B. Layout

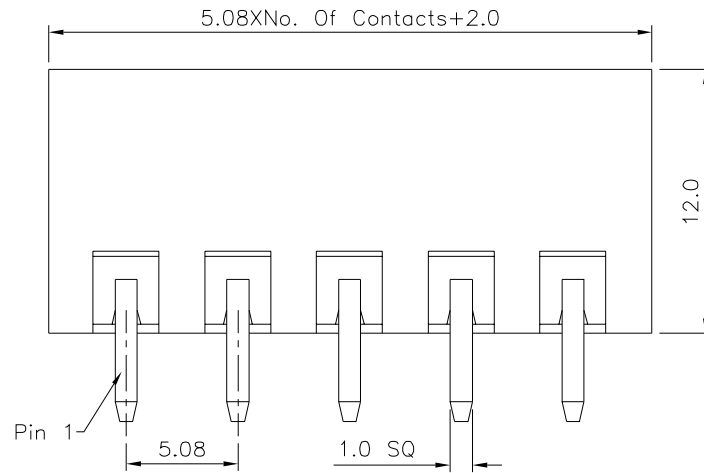

SPECIFICATION

Current Rating:16A
Voltage Rating:300V AC
Withstanding Voltage:2500V AC(1Minute)
Using Temperature Range:-40°C~+105°C
Solder Pin:Copper Alloy,Tin Plated
Insulator Body(Housing):Polyamide(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

09140

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee

REV.

B0

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

X. ±0.50

.X ±0.30

.XX ±0.20

ANG. ±1°

UNIT

mm



NO. REV.

B0 NEW RELEASE

REVISIONS

CHK

06/01/2025

DATE