
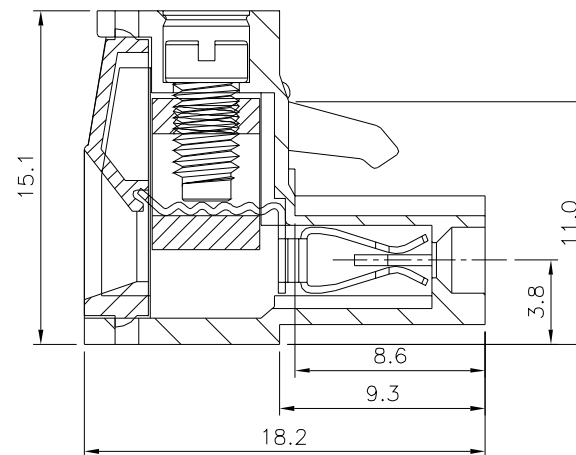
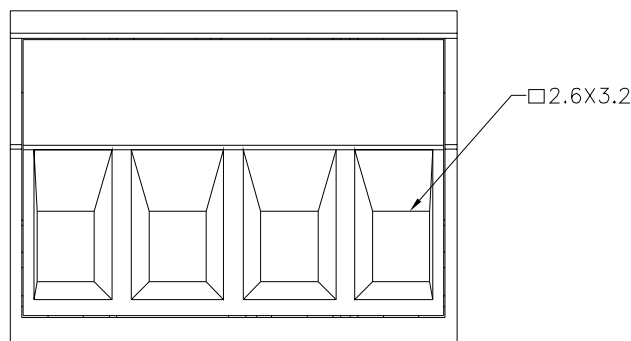


# SPECIFICATION

Current Rating:16A/Way Max.  
Voltage Rating:300V AC  
Contact Resistance:20 Milliohms Max.  
Withstanding Voltage:2500V AC/Minute  
Operation Temperature:-40°C~+105°C  
Wire Range:12~26 AWG  
Torque:5.0 Kgf.cm/M3  
Insulator Body:Polyamide(UL94V-0),Green  
Contact:Copper Alloy,Nickel Plated  
Wire Guard:Copper Alloy,Tin Plated  
Screw:Steel,Galvanized With Cr3+ Plated  
RoHS Compliant

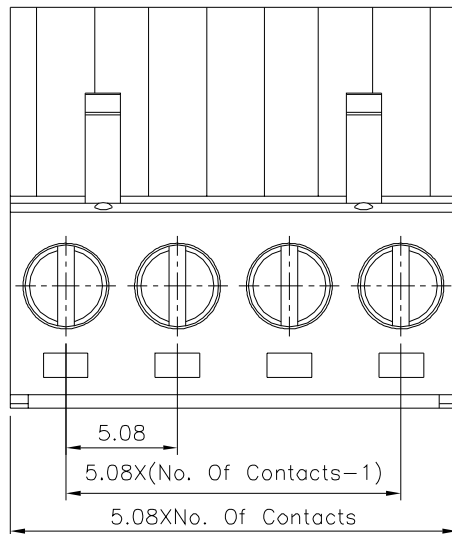

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

09163

APPROVED BY  
Jason Wu

CHECKED BY  
Leo Han

DRAWING BY  
Michelle Lee

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
X. ±0.50  
.X ±0.30  
.XX ±0.20  
ANG. ±1°

SCALE

NONE

REV.

B0

UNIT  
mm



NO. REV.

REVISIONS

CHK

DATE

|    |             |     |            |
|----|-------------|-----|------------|
| B0 | NEW RELEASE | HZF | 07/25/2024 |
|----|-------------|-----|------------|