
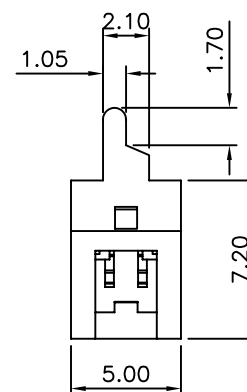
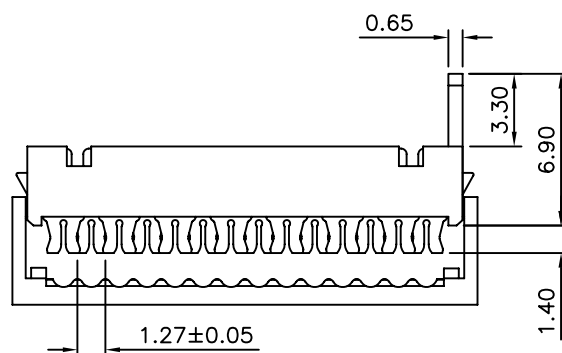
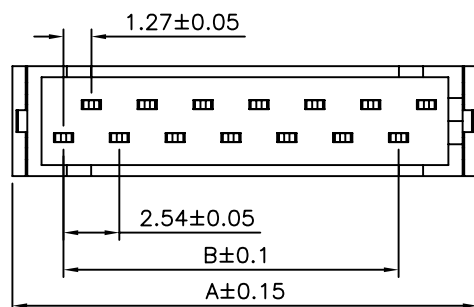


SPECIFICATIONS

Current Rating:1.0A AC,DC
Voltage Rating:30V AC,DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megohms Min.
Withstanding Voltage:AC 500V AC/Minute
Operating Temperature:-40°C ~ +105°C
Insulator:High Temp. Plastic UL94V-0
Contact:Phosphor Bronze
Finish:Tin Plated

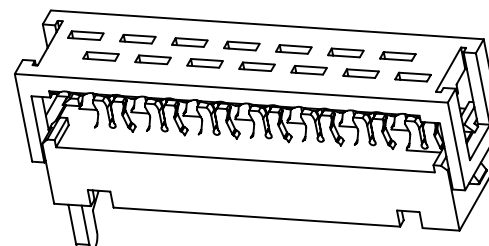

Circuit	Dim. A	Dim. B
04	8.45	2.54
06	10.99	5.08
08	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

09231

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.2

.XX ±0.15

ANG.


SCALE

NONE

REV.

A0

UNIT
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

BECKY

02/15/2005

CHK

DATE