

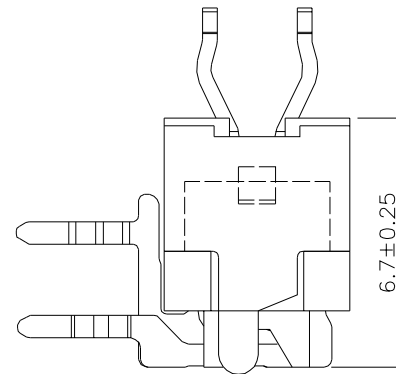
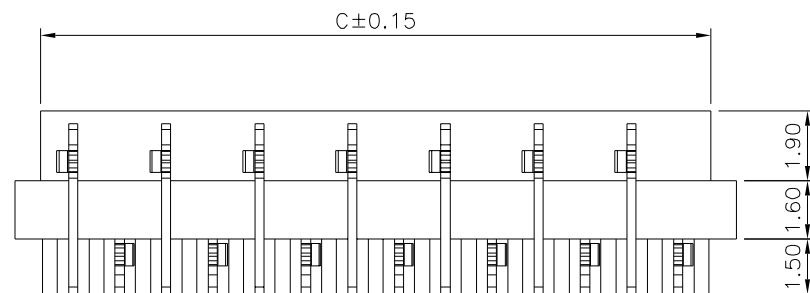


Recommended P.C.B. Layout

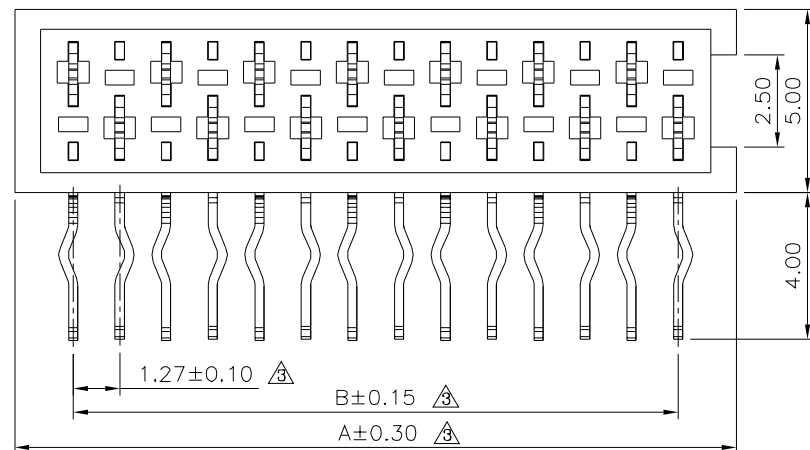

Mating Height Draw.

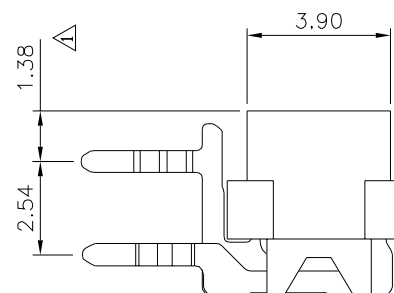

SPECIFICATION

Current Rating:1.0A AC/DC

Voltage Rating:30V AC/DC

Contact Resistance:20 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

Withstanding Voltage:500V AC/Minute

Operation Temperature Range:-40°C~+105°C

Insulator:PA9T(UL94V-0),Red

Contact:Phosphor Bronze,Tin Plated

RoHS Compliant

Pin	A	B	C
04	7.00	3.81	5.60
06	9.54	6.35	8.14
08	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92
22	29.86	26.67	28.46
24	32.40	29.21	31.00
26	34.94	31.75	33.54

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 09255

09255

SCALE

NONE

REV.

A3

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


.X ±0.20

.XX ±0.15

ANG.

UNIT

mm



NO.

REV.

A3

A2

A1

A0

Modify Data

Modify Data

Modify Data

NEW RELEASE

REVISIONS

CHK

DATE

HZF

HZF

HZF

BECKY

DATE

02/11/2022

03/21/2011

06/09/2010

02/15/2005