

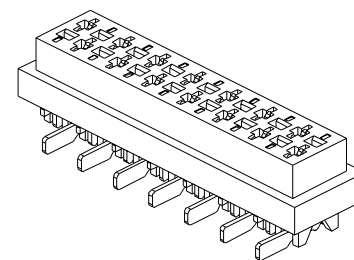
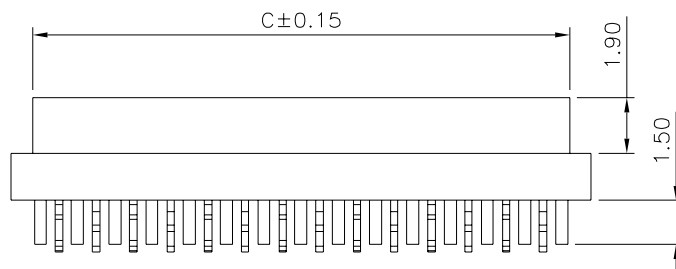
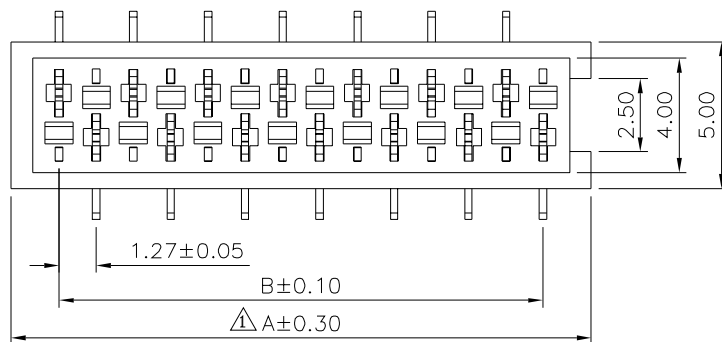


SPECIFICATION

- Current Rating:1.5A AC/DC
- Voltage Rating:230V AC/DC
- Contact Resistance:20 Milliohms Max.
- Insulation Resistance:1000 Megaohms Min.
- Withstand Voltage:500V AC/Minute
- Operation Temperature Range:-40°C~+105°C
- Insulator:PA46(UL94V-0),Red
- Contact:Phosphor Bronze,Tin Plated Over Nickel
- RoHS Compliant

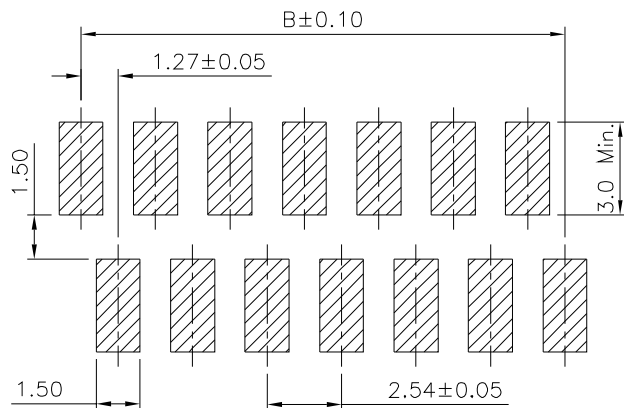

Pin	A	B	C
04	7.00	3.81	5.60
06	9.54	6.35	8.14
08	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92
22	29.86	26.67	28.46
24	32.40	29.21	31.00
26	34.94	31.75	33.54

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

09269

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

SAN

REV.

B2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.2

.XX ± 0.15

ANG.

UNIT

mm



	B2	Modify Data	HZF	07/25/2020
	B1	Modify Data	HZF	03/08/2017
	B0	NEW RELEASE	HZF	03/03/2014
NO.REV.	REVISIONS		CHK	DATE