


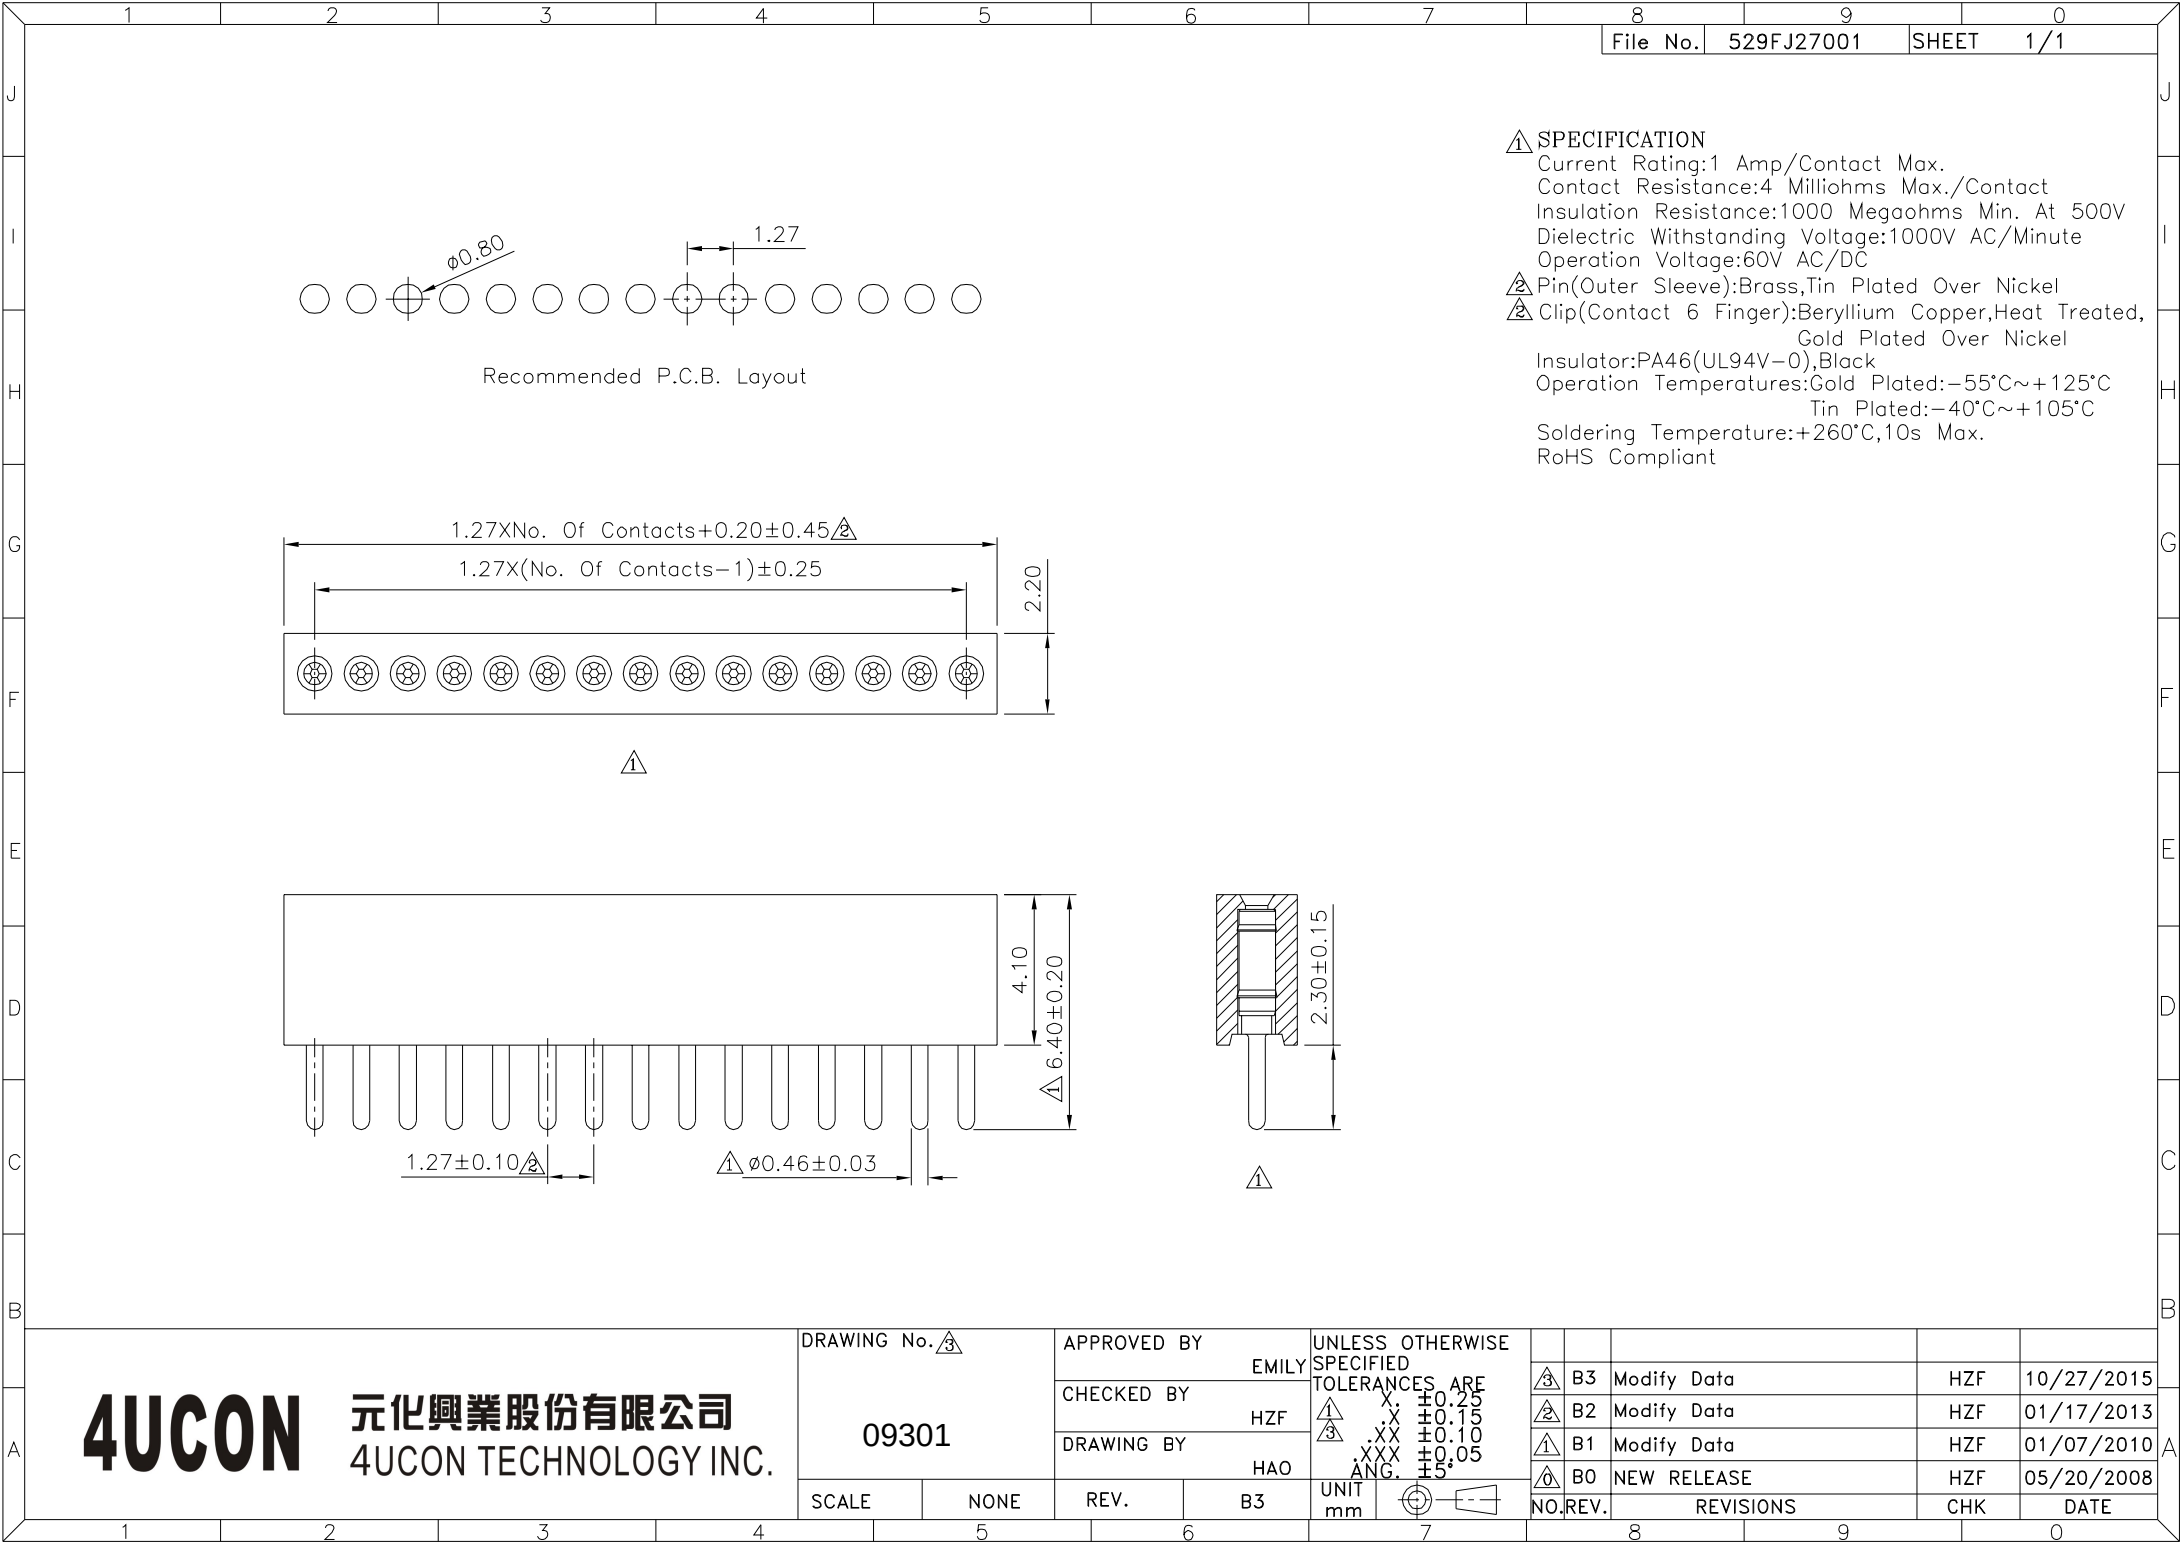

△ SPECIFICATION
Current Rating:1 Amp/Contact Max.
Contact Resistance:4 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 500V
Dielectric Withstanding Voltage:1000V AC/Minute
Operation Voltage:60V AC/DC
△ Pin(Outer Sleeve):Brass,Tin Plated Over Nickel
△ Clip(Contact 6 Finger):Beryllium Copper,Heat Treated, Gold Plated Over Nickel
Insulator:PA46(UL94V-0),Black
Operation Temperatures:Gold Plated:-55°C~+125°C
Tin Plated:-40°C~+105°C
Soldering Temperature:+260°C,10s Max.
RoHS Compliant

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. <u>A</u> 09301		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 A. X. ±0.15 A. XX ±0.10 XXX ±0.05 ANG. ±5°					
		EMILY			A3	B3	Modify Data	HZF	10/27/2015
		CHECKED BY			A1	B2	Modify Data	HZF	01/17/2013
		HZF			A3	B1	Modify Data	HZF	01/07/2010
		DRAWING BY				B0	NEW RELEASE	HZF	05/20/2008
HAO									
SCALE	NONE	REV.	B3	UNIT mm		NO. REV.	REVISIONS	CHK	DATE