
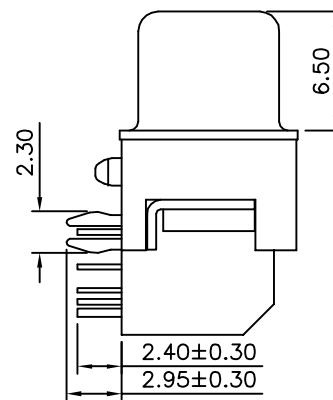
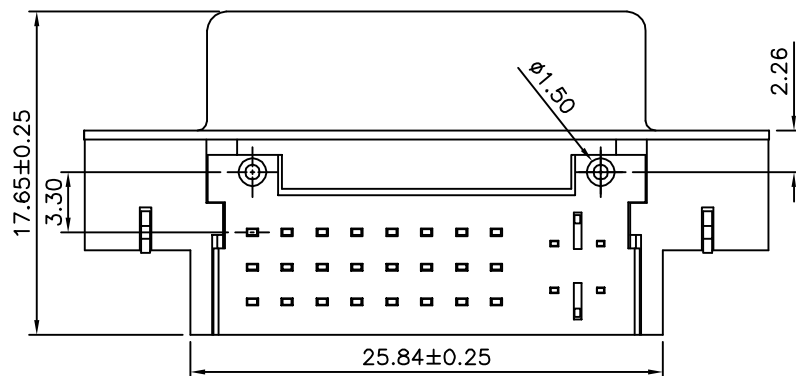
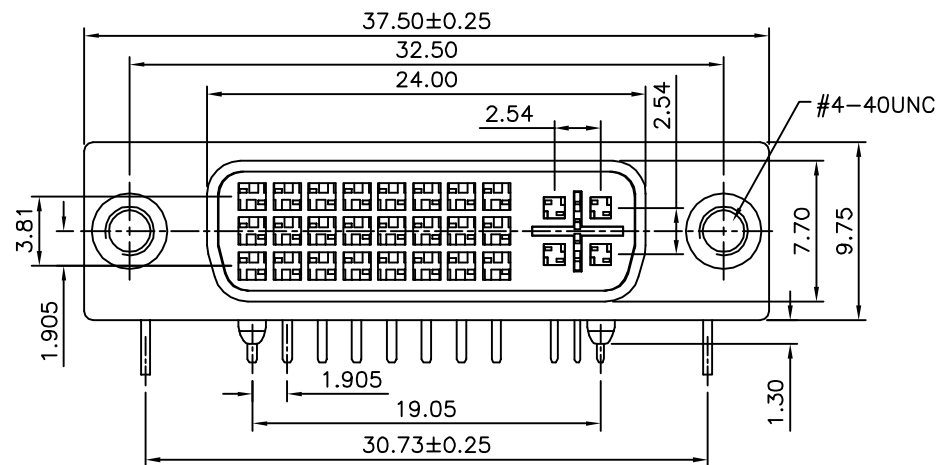


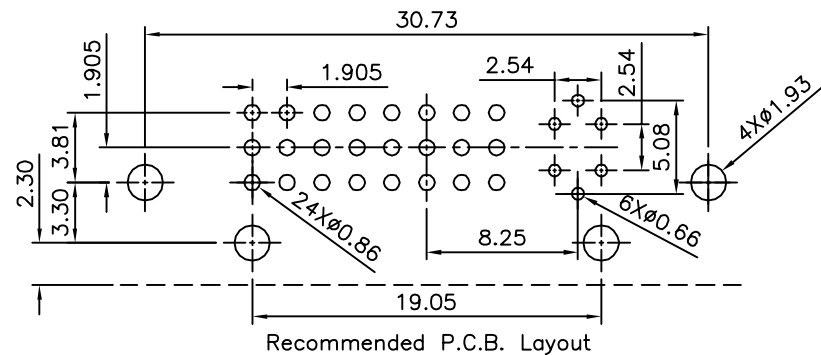

SPECIFICATION

Dielectric Withstanding Voltage:500V AC
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 At 500V DC
 Operation Temperature:-20°C~+85°C
 Housing:PBT+30%G.F.(UL94V-0),White
 Cover:PA66+30%G.F.(UL94V-0),White
 Contact:Brass,Gold Flash On Contact Area,Tin
 Plated On Solder Tails,Over Nickel
 Shell:SPCC,Nickel Plated Over Copper
 Boardlock:SPCC,Tin Plated
 Rivet:Copper Alloy,Nickel Plated
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

09401

APPROVED BY

EMILY

CHECKED BY

HZF


DRAWING BY

SONG

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.25	.X* ±3*
.XX ±0.15	.XX* ±1*
.XXX ±0.05	.XXX* ±0.5*

UNIT
 mm



NO.

REV.

A0 NEW RELEASE

REVISIONS

HZF

CHK

02/07/2012

DATE

SCALE

NONE

REV.

A0