

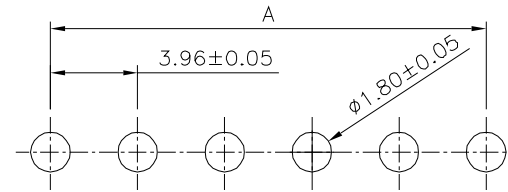
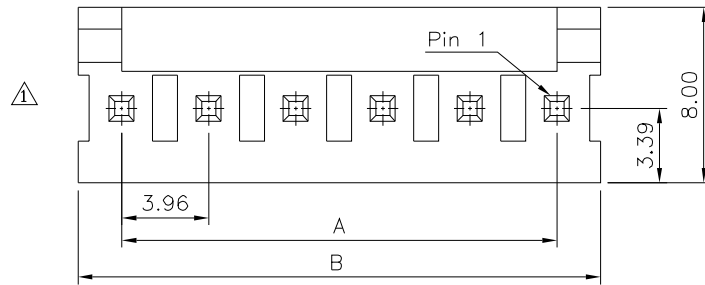
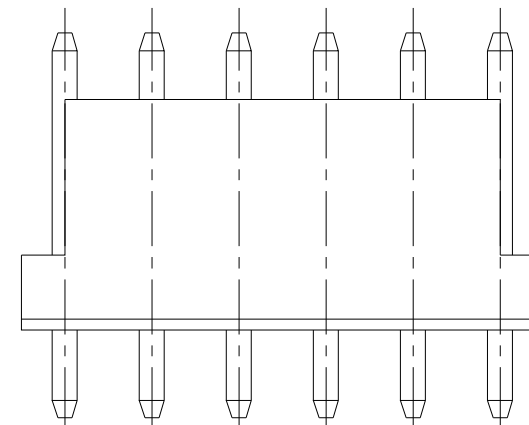


△₃△₁ SPECIFICATION

Electrical Rating:UL 250V 4A,AC/DC
CSA 125V 5A,AC/DC
Insulator:PA66 UL94V-2,White
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

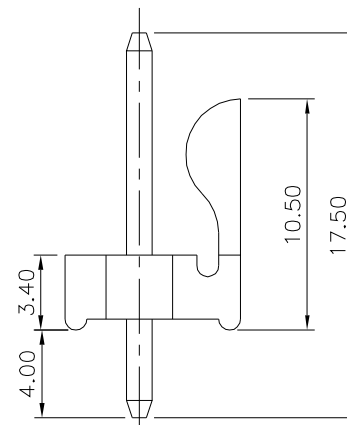


△ Recommended P.C.B. Layout

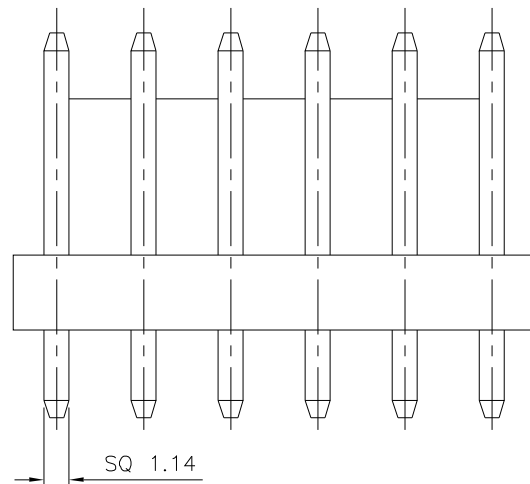

0 0 0 0 Δ $\&B$	Circuits	A	B
	2	3.96	7.92
	3	7.92	11.88
	4	11.88	15.84
	5	15.84	19.80
	6	19.80	23.76
	7	23.76	27.72
	8	27.72	31.68
	9	31.68	35.64
	10	35.64	39.60
	11	39.60	43.56
	12	43.56	47.52
	13	47.52	51.48
	14	51.48	55.44
	15	55.44	59.40
	16	59.40	63.36
	17	63.36	67.32
	18	67.32	71.28
	19	71.28	75.24
	20	75.24	79.20
	21	79.20	83.16
	22	83.16	87.12
	23	87.12	91.08
	24	91.08	95.04
	25	95.04	99.00
	26	99.00	102.96
	27	102.96	106.92
	28	106.92	110.88

③ Pin	UL94V-2	UL94V-0
	Tolerances(A&B)	Tolerances(A&E)
2-10P	+0.20/-0.10	+0.30/-0.10
11-15P	+0.30/-0.10	+0.40/-0.10
16-20P	+0.40/-0.10	+0.50/-0.10
21-28P	+0.50/-0.10	+0.60/-0.10

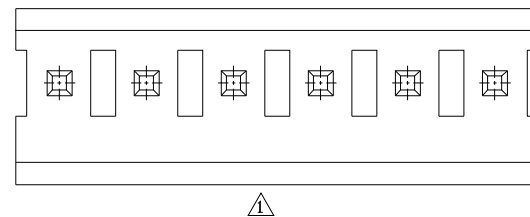

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No. 3

09529

SCALE	NONE
-------	------

NONE	REV.
------	------

APPROVED BY	EMILY
-------------	-------

CHECKED BY HZF


DRAWING BY	YBI
------------	-----

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE

① .X	±0.30
.XX	±0.20
.XXX	±0.10
ANG	±2°

UNIT	mm
------	----



3	B3
---	----

3	Modify Data
---	-------------

HZF

05/31/2022

2	B2

2	Modify Data
---	-------------

HZF

10/18/2013

$\frac{1}{2}$	
$\frac{1}{2}$	B1

1	Modify Data
---	-------------

HZF

01/25/2010	
------------	--

	
	BO

NEW RELEASES

H7F

[illegible]

ΔU	BU
NO	REV

NEW RELEASES
REVIEW

CHK

	DATE