



J
I
H
G
F
E
D
C
B
A

J
I
H
G
F
E
D
C
B
A





3.1

SPECIFICATION

Electrical Rating:UL 250V 4A,AC/DC
CSA 125V 5A,AC/DC
Insulator:PA66 UL94V-2,White
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

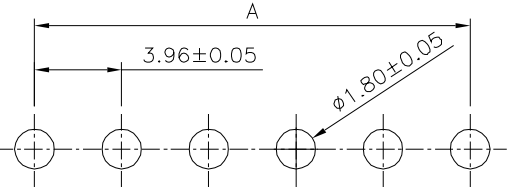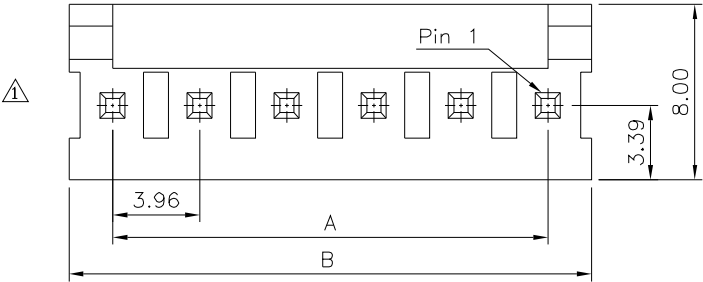

1Recommended P.C.B. Layout

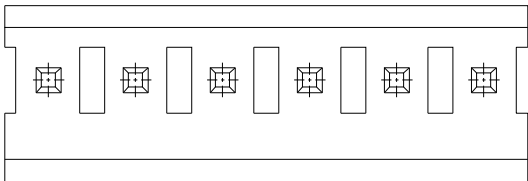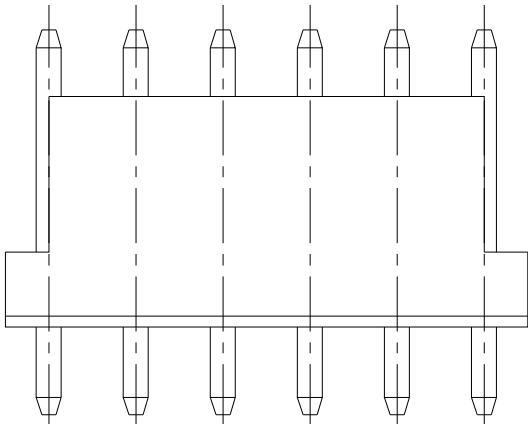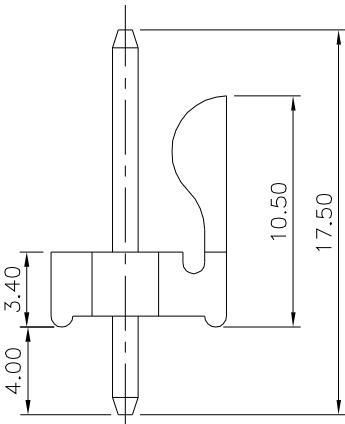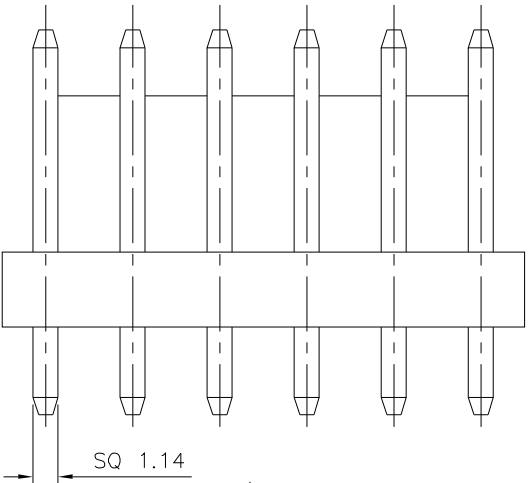

1

Circuits	A	B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
19	71.28	75.24
20	75.24	79.20
21	79.20	83.16
22	83.16	87.12
23	87.12	91.08
24	91.08	95.04
25	95.04	99.00
26	99.00	102.96
27	102.96	106.92
28	106.92	110.88

3

Pin	UL94V-2	UL94V-0
	Tolerances(A&B)	Tolerances(A&B)
2-10P	+0.20/-0.10	+0.30/-0.10
11-15P	+0.30/-0.10	+0.40/-0.10
16-20P	+0.40/-0.10	+0.50/-0.10
21-28P	+0.50/-0.10	+0.60/-0.10

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 3

09531

SCALE NONE

APPROVED BY
EMILY
CHECKED BY
HZF
DRAWING BY
YBL

REV. B3

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
1.X ±0.30
2.XX ±0.20
3.XXX ±0.10
ANG. ±2°

UNIT mm

3

NO.	REV.	REVISIONS	CHK	DATE
3	B3	Modify Data	HZF	05/31/2022
2	B2	Modify Data	HZF	10/18/2013
1	B1	Modify Data	HZF	01/25/2010
0	B0	NEW RELEASE	HZF	