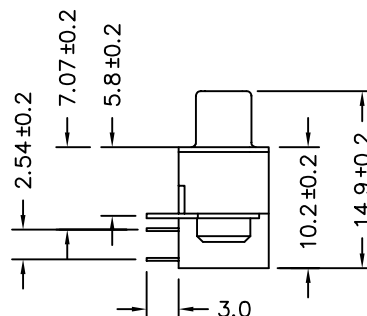
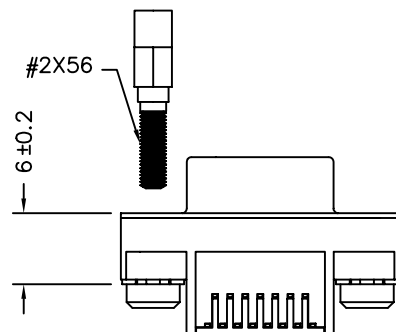

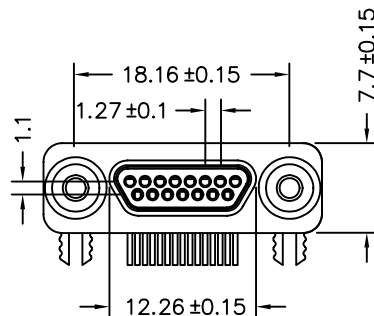


Electrical Characteristics :

Contact current rating : 1A
Dielectric withstanding voltage : 500VAC
Insulation resistance : 1000 megohms min.
Contact resistance : 25 milliohms max.

Materials :


Contact : Phosphor bronze
Insulator : Thermoplastic 94v-0
Shell : Gold roller steel
Bracket : Zinc alloy

Finishes

Contact: 5u"(30u")min. gold on mating end 120u" min.
Tin-Lead on termination end all underplated 50u" min. nickel
Shell : 120u" min. nickel or bright tin over 80u" min. copper
Bracket : Zinc plated nickel over copper

Environment

Operation temperature : -55°c to +85°c

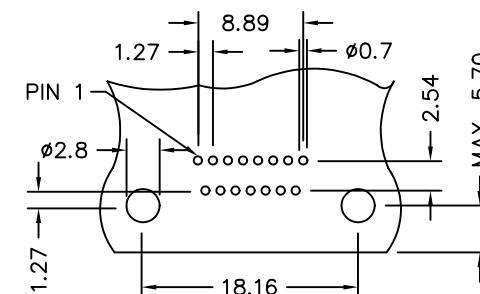

RECOMMENDED PC BOARD LAYOUT
(8 POSITION ONLY)

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

09589

APPROVED BY

MEI

CHECKED BY

RAN

DRAWING BY

HZF

UNLESS OTHERWISE
SPECIFIED

TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±1°


SCALE

NONE

REV.

A

UNIT
mm



AREA

REVISIONS

CHK

DATE