

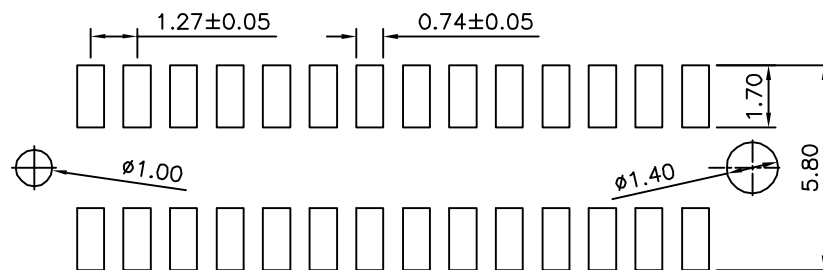
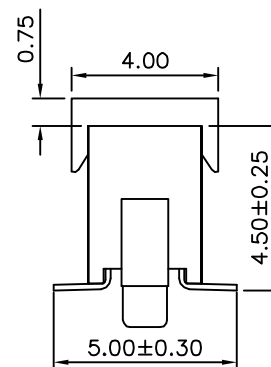


SPECIFICATION

Current Rating:1A
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA6T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

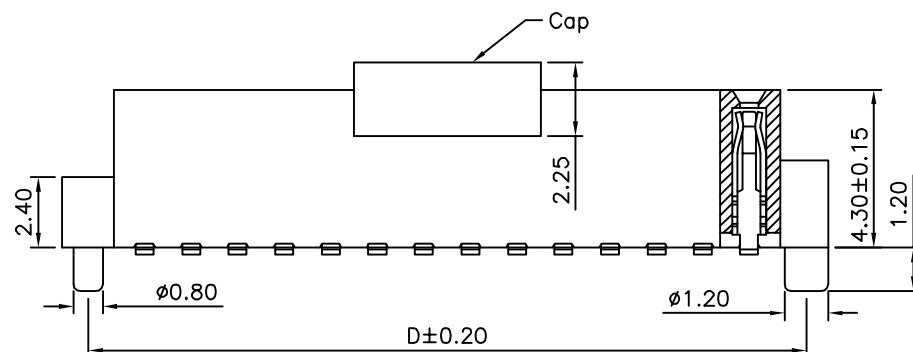

Recommended P.C.B. Layout

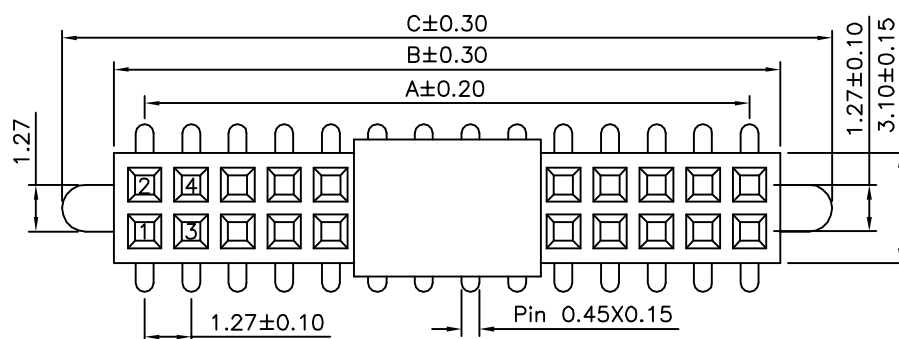

Pin	A	B	C	D	Pin	A	B	C	D
06	2.54	4.21	6.91	5.58	54	33.02	34.69	37.39	36.06
08	3.81	5.48	8.18	6.85	56	34.29	35.96	38.66	37.33
10	5.08	6.75	9.45	8.12	58	35.56	37.23	39.93	38.60
12	6.35	8.02	10.72	9.39	60	36.83	38.50	41.20	39.87
14	7.62	9.29	11.99	10.66	62	38.10	39.77	42.47	41.14
16	8.89	10.56	13.26	11.93	64	39.37	41.04	43.74	42.41
18	10.16	11.83	14.53	13.20	66	40.64	42.31	45.01	43.68
20	11.43	13.10	15.80	14.47	68	41.91	43.58	46.28	44.98
22	12.70	14.37	17.07	15.74	70	43.18	44.85	47.55	46.22
24	13.97	15.64	18.34	17.01	72	44.45	46.12	48.82	47.49
26	15.24	16.91	19.61	18.28	74	45.72	47.39	50.09	48.76
28	16.51	18.18	20.88	19.55	76	46.99	48.66	51.36	50.03
30	17.78	19.45	22.15	20.82	78	48.26	49.93	52.63	51.30
32	19.05	20.72	23.42	22.09	80	49.53	51.20	53.90	52.57
34	20.32	21.99	24.69	23.36	82	50.80	52.47	55.17	53.84
36	21.59	23.26	25.96	24.63	84	52.07	53.74	56.44	55.11
38	22.86	24.53	27.23	25.90	86	53.34	55.01	57.71	56.38
40	24.13	25.80	28.50	27.17	88	54.61	56.28	58.98	57.65
42	25.40	27.07	29.77	28.44	90	55.88	57.55	60.25	58.92
44	26.67	28.34	31.04	29.71	92	57.15	58.82	61.52	60.19
46	27.94	29.61	32.31	30.98	94	58.42	60.09	62.79	61.46
48	29.21	30.88	33.58	32.25	96	59.69	61.36	64.06	62.73
50	30.48	32.15	34.85	33.52	98	60.96	62.63	65.33	64.00
52	31.75	33.42	36.12	34.79	100	62.23	63.90	66.60	65.27

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

09953

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO

REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.30

.XX ±0.20

UNIT

mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE

06/14/2015