

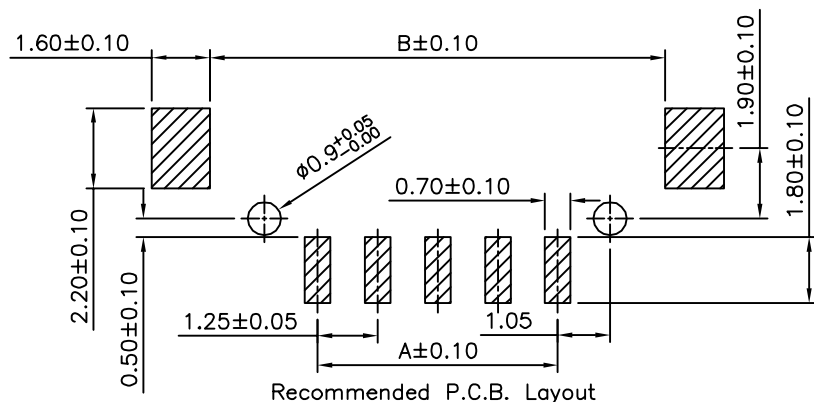
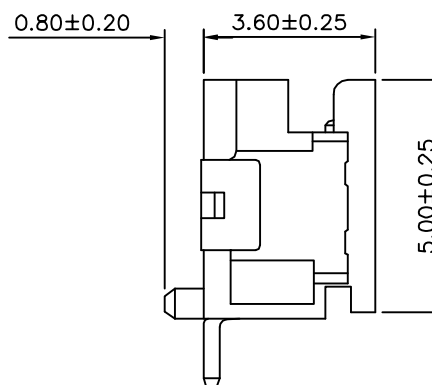


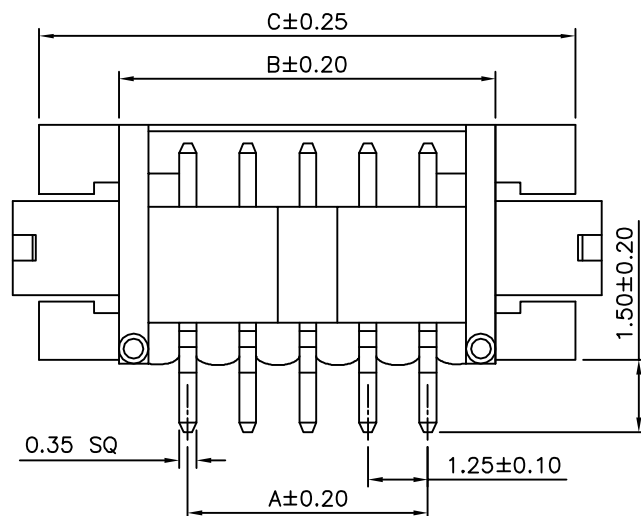

Recommended P.C.B. Layout

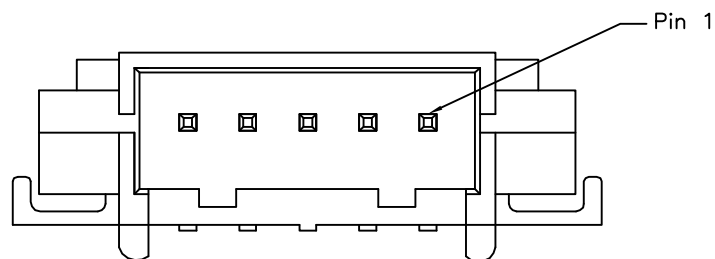

SPECIFICATION

Current Rating:1A DC/AC
Voltage Rating:100 DC/AC
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:500 Megaohms Min.
Temperature Range:-25°C~+85°C
Insulator:PA6T(UL94V-O)
Contact:Phosphor Bronze,Tin Plated
Solder Tabs:Brass,Tin Plated
RoHS Compliant

Pin	A	B	C
2	1.25	4.15	6.25
3	2.50	5.40	7.50
4	3.75	6.65	8.75
5	5.00	7.90	10.00
6	6.25	9.15	11.25
7	7.50	10.40	12.50
8	8.75	11.65	13.75
9	10.00	12.90	15.00
10	11.25	14.15	16.25
11	12.50	15.40	17.50
12	13.75	16.65	18.75
13	15.00	17.90	20.00
14	16.25	19.15	21.25
15	17.50	20.40	22.50

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10002

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
.X ± 0.25	
.XX ± 0.15	
ANG.	

UNIT	mm
------	----



△	AO
NO.	REV.

NEW RELEASE

REVISIONS

HZF

	12/05/2011
--	------------

CHK

DATE
