

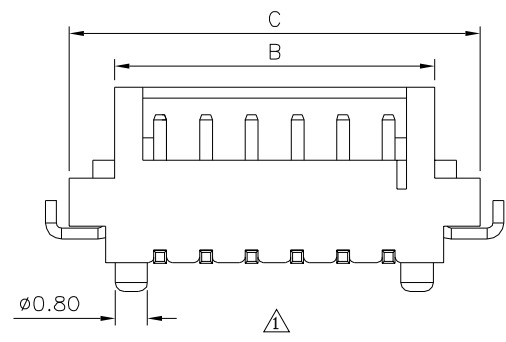


**SPECIFICATION**

Current Rating:1A DC/AC  
 Voltage Rating:100V DC/AC  
 Withstand Voltage:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:500 Megaohms Min.  
 Temperature Range:-25°C~+85°C  
 Insulator:PA6T(UL94V-0)  
 Contact:Phosphor Bronze,Tin Plated  
 Solder Tabs:Brass,Tin Plated  
 RoHS Compliant

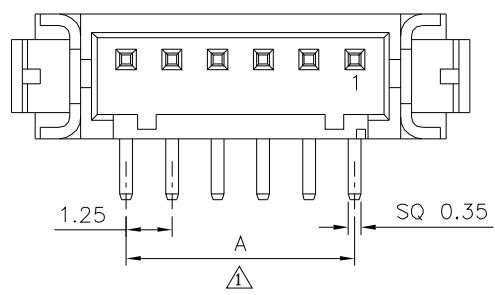

Pin	A	B	C
2	1.25	4.15	6.25
3	2.50	5.40	7.50
4	3.75	6.65	8.75
5	5.00	7.90	10.00
6	6.25	9.15	11.25
7	7.50	10.40	12.50
8	8.75	11.65	13.75
9	10.00	12.90	15.00
10	11.25	14.15	16.25
11	12.50	15.40	17.50
12	13.75	16.65	18.75
13	15.00	17.90	20.00
14	16.25	19.15	21.25
15	17.50	20.40	22.50

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.  $\Delta$   
 10007

APPROVED BY EMILY  
 CHECKED BY HZF  
 DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.25  
 .XX ±0.15  
 ANG.

SCALE NONE

REV. A1

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
$\Delta$ A1		Modify Data	HZF	01/05/2015
$\Delta$ A0		NEW RELEASE	HZF	02/06/2012