
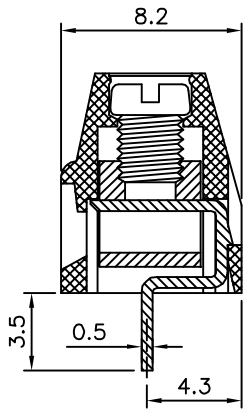
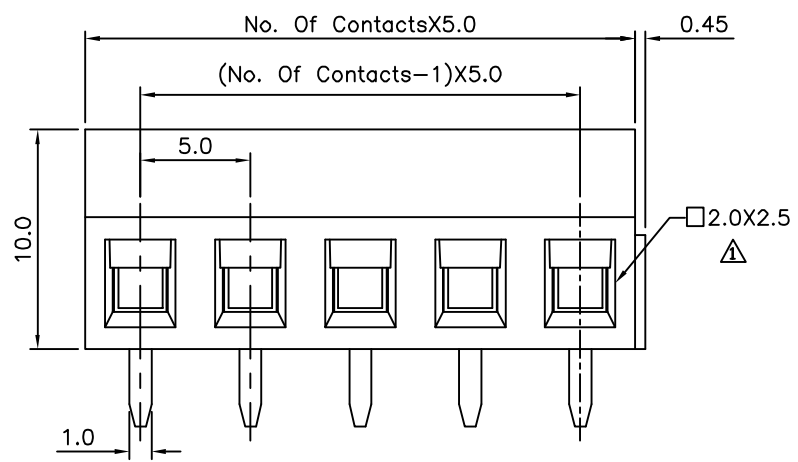


Recommended P.C.B. Layout

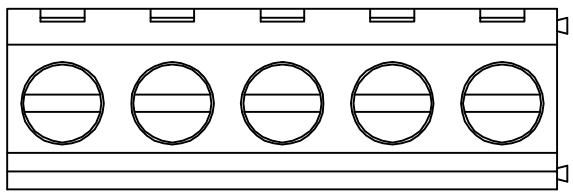

**△ SPECIFICATION**

- △ Current Rating:16 Amp/Way Max.
- △ Voltage Rating:300V AC
- △ Contact Resistance:20 Milliohms Max.
- △ Operation Temperature:-40°C~+105°C
- △ Soldering Reliability:Test Temperature: 250°C±10°C/5s Max.
- △ Withsanding Voltage:2500V AC(1 Minute)
- △ Test Time=60s/1 PCS
- △ Wire Range:16~30 AWG
- △ Torque:4.5 Kgf.cm/M3.0
- △ Insulating Body(Housing):Polyamide(UL94V-0),Green
- △ Contact(Metal Housing):Copper Alloy,Nickel Plated
- △ Solder Pin:Copper Alloy,Tin Plated
- △ Terminal Screw:Steel,Galvanized With Cr3+ Plated
- △ RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°
10029		EMILY		
		CHECKED BY HZF		
		DRAWING BY CYP		
SCALE	NONE	REV.	A4	UNIT mm

△ A4	Modify Data	HZF	12/04/2014
△ A3	Modify Data	HZF	06/14/2013
△ A2	Modify Data	HZF	12/15/2011
△ A1	Modify Data	HZF	09/13/2011
△ A0	NEW RELEASE	HZF	11/13/2009
NO. REV.	REVISIONS	CHK	DATE