
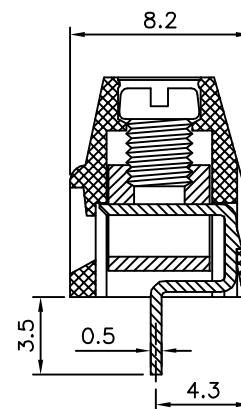
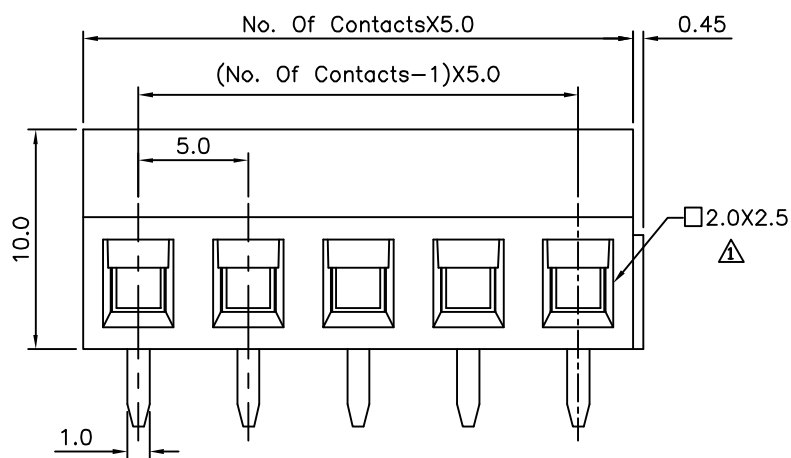


Recommended P.C.B. Layout

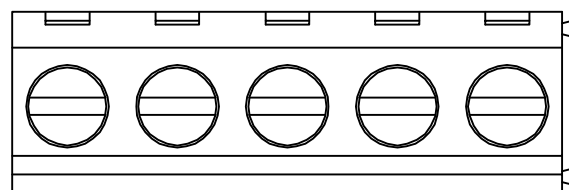

# △ SPECIFICATION

Current Rating:16 Amp/Way Max.  
Voltage Rating:300V AC  
Contact Resistance:20 Milliohms Max.  
Operation Temperature:-40°C~+105°C  
Soldering Reliability:Test Temperature:  
250°C±10°C/5s Max.  
Withsanding Voltage:2500V AC(1 Minute)  
Test Time=60s/1 PCS

- △ Wire Range:16~30 AWG
- △ Torque:4.5 Kgf.cm/M3.0
- △ Insulating Body(Housing):Polyamide(UL94V-0),Green
- △ Contact(Metal Housing):Copper Alloy,Nickel Plated
- △ Solder Pin:Copper Alloy,Tin Plated
- △ Terminal Screw:Steel,Galvanized With Cr3+ Plated
- RoHS Compliant

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

10033

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A4

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

X. ±0.50  
.X ±0.30  
.XX ±0.20  
ANG. ±1°

UNIT  
mm



| NO.  | REV. | REVISIONS   | CHK | DATE       |
|------|------|-------------|-----|------------|
| △ A4 |      | Modify Data | HZF | 12/04/2014 |
| △ A3 |      | Modify Data | HZF | 06/14/2013 |
| △ A2 |      | Modify Data | HZF | 12/15/2011 |
| △ A1 |      | Modify Data | HZF | 09/13/2011 |
| △ A0 |      | NEW RELEASE | HZF | 11/13/2009 |