




1/2

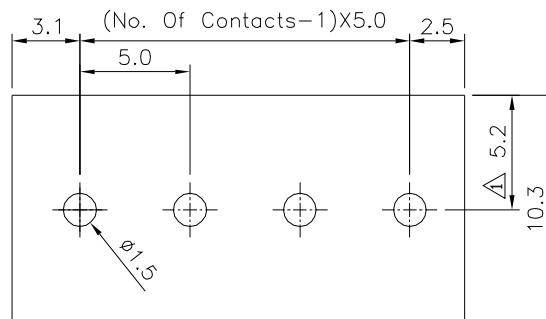

Recommended P.C.B. Layout

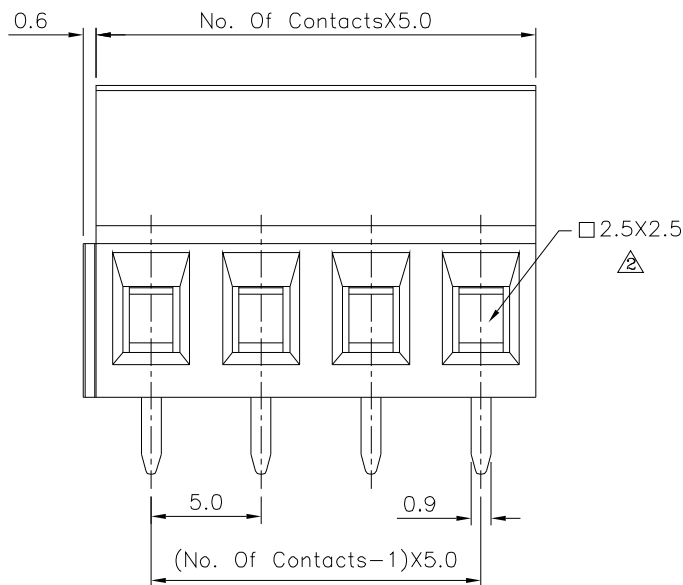

1

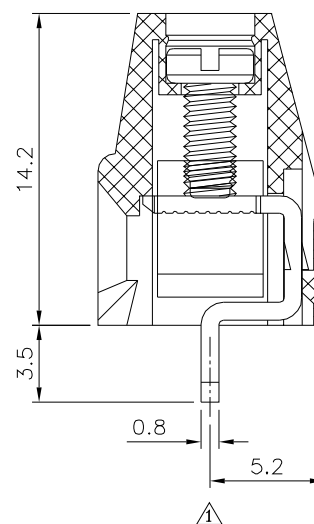

1

△△△ SPECIFICATION

Voltage Rating:300V AC
Current Rating:16A/Way Max.
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:2500V AC(1Min) Test Time=60 Sec./1Pcs
Wire Range:12~30 AWG
Torque:4.5 Kgf.cm/M3.0
Operation Temperature:-40°C~+105°C
△ Contact(Metal Housing):Copper Alloy,Nickel Plated
Terminal Screw:Steel,Galvanized With Cr3+ Plated
Solder Pin:Copper Alloy,Tin Plated
Insulator Body(Housing):Polyamide(UL94V-0),Green
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

△

APPROVED BY

MEI

10040

CHECKED BY

HZF

DRAWING BY

YBL

SCALE

NONE

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

UNIT
mm



△

A4

Modify Data

HZF

10/20/2023

△

A3

Modify Data

HZF

02/21/2014

△

A2

Modify Data

HZF

10/19/2011

△

A1

Modify Data

HZF

12/09/2010

△

A0

NEW RELEASE

HZF

04/12/2009

NO.REV.

REVISIONS

CHK

DATE