

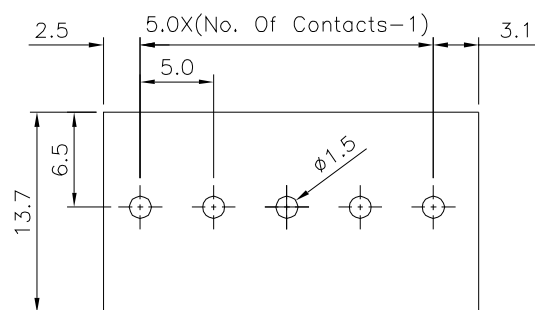
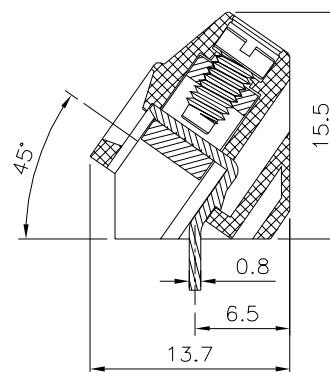


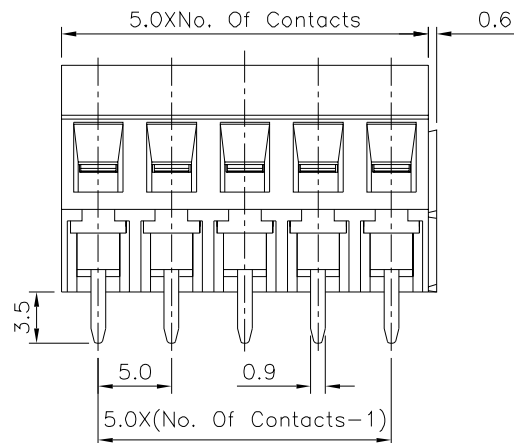

Recommended P.C.B. Layout

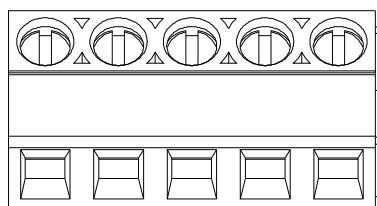

# SPECIFICATION

Current Rating:15 Amps/Way Max.

Voltage Rating:300V AC

Contact Resistance:20 Milliohms Max.

Withstanding Voltage:2500V AC(1 Minute)

Test Time=60s/1 PCS

Wire Range:12~26 AWG

Operation Temperature:-40°C~+105°C

Soldering Reliability:250°C±10°C/5 Seconds Max.

Torque:4.0 Kgf.cm/M2.5

Contact(Metal Housing):Copper Alloy,Nickel Plated

Terminal Screw:Steel,Galvanized With Cr3+ Plated

Solder Pin:Copper Alloy,Tin Plated

Insulator Body(Housing):Polyamide(UL94V-0),Green

RoHS Compliant

**4UCON**

元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

10053

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

B0

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
X. ±0.50  
.X ±0.30  
.XX ±0.20  
ANG. ±1°

UNIT  
mm



NO. REV.

BO NEW RELEASE

REVISIONS

CHK

DATE

03/15/2020