

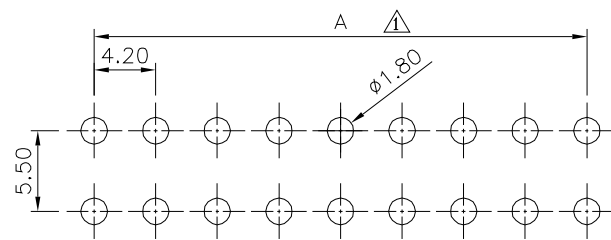
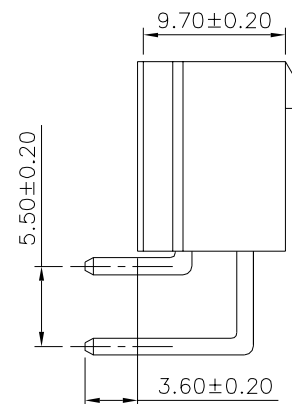


SPECIFICATION

Current Rating:7A AC/DC
 Voltage Rating:600V AC/DC
 Withstanding Voltage:1500V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:10 Milliohms Max.
 Operation Temperature:-25°C~+85°C
 Insulator:PA66(UL94V-2),Nature
 Contact:Brass,Tin Plated
 RoHS Compliant

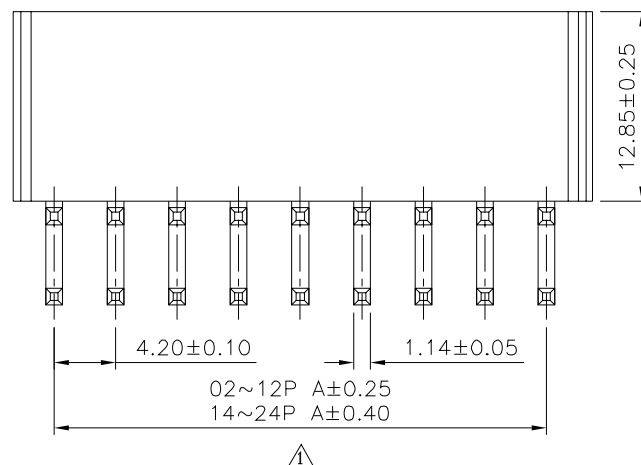

Recommended P.C.B. Layout

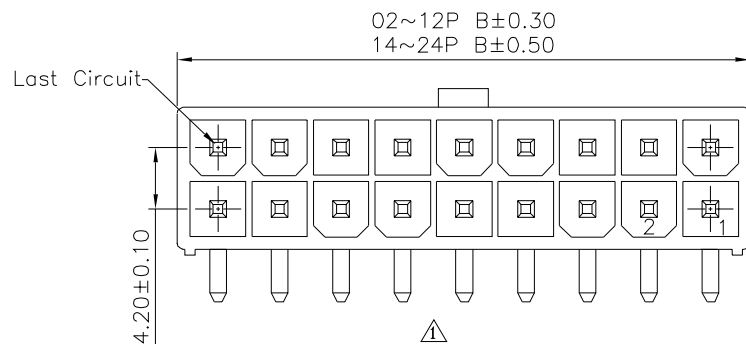

Pin	A	B
02	--	5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

10090

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.


A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.30
 .X ±0.25
 .XX ±0.20
 .XXX ±0.015


UNIT
 mm




NO.	REV.	REVISIONS	CHK	DATE
△2	A2	Modify Data	HZF	07/30/2015
△1	A1	Modify Data	HZF	06/10/2014
△0	A0	NEW RELEASE	HZF	05/14/2011

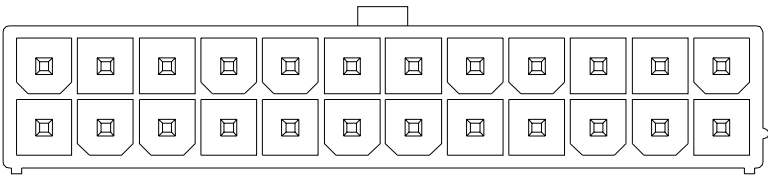


2X12P

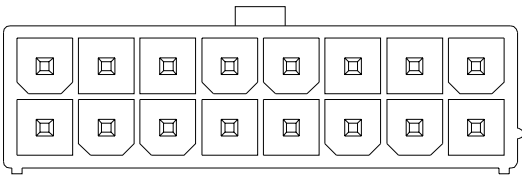


2X08P




2X04P

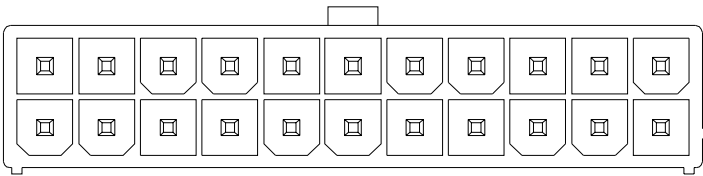


2X11P

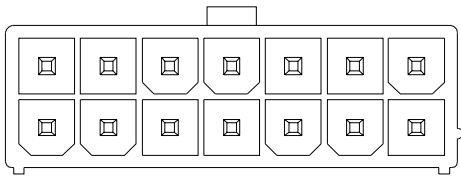


2X07P




2X03P

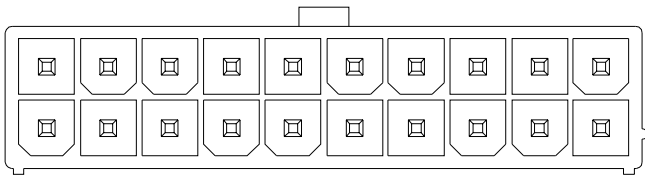


2X10P

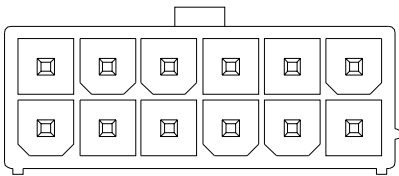


2X06P




2X02P

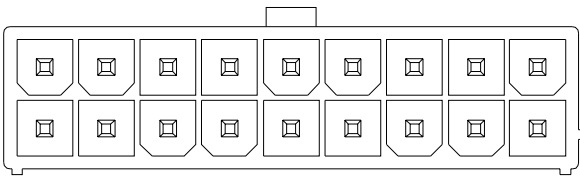

2X09P



2X05P



2X01P