

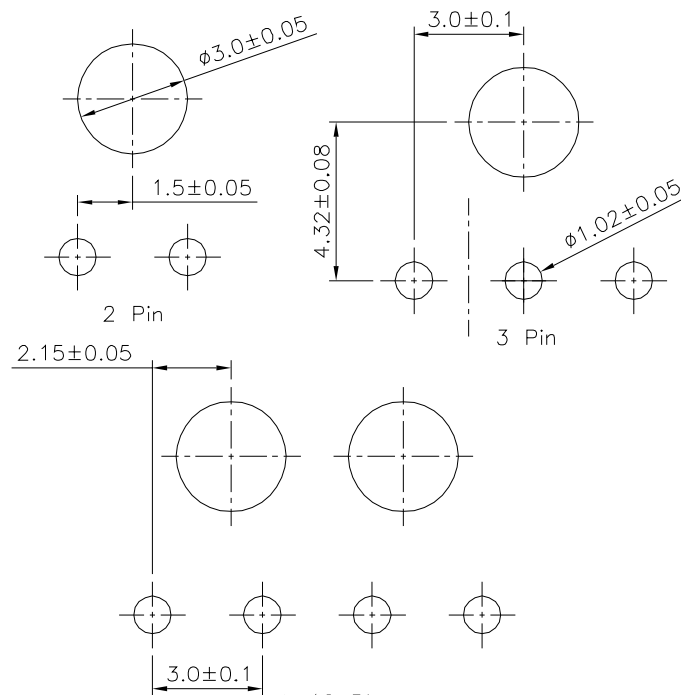
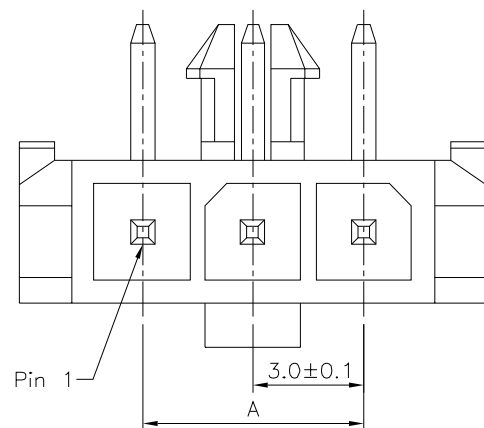


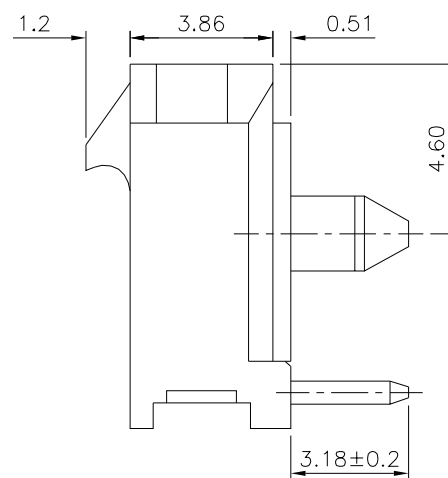

Recommended P.C.B. Layout

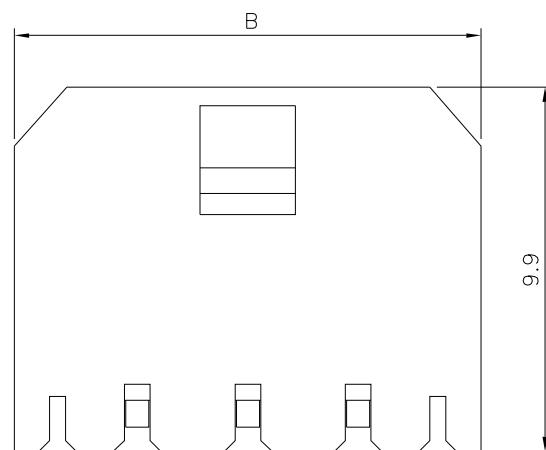

SPECIFICATION

1.General Characteristics

3.0mm Micro-Fit Wafer 1XXX DIP 90° With
Post Black Insulator Withstand High Temperature

2. Material&Finish

Insulator: LCP (UL94V-0), Black
Contact: 0.625mm Square Pins, Brass, Tin Plated

3. Electrical Characteristics

Current Rating:

Wire Size	#20	#22	#24	#26	#28	#30
Amp	5A	5A	4A	3A	2A	1A

Voltage Rating: 250V AC(RMS)/DC

Contact Resistance: 10 Milliohms Max.

Dielectric Strength:1500V AC/Minute

4.Environmental Characteristics

Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

5.RoHS Compliant

Pin	A	B
2	3.0	9.65
3	6.0	12.65
4	9.0	15.65
5	12.0	18.65
6	15.0	21.65
7	18.0	24.65
8	21.0	27.65
9	24.0	30.65
10	27.0	33.65
11	30.0	36.65
12	33.0	39.65

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

10548

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X	±0.25
.XX	±0.15
.XXX	±0.05

	UNIT
	mm



NO.	REV.
-----	------

0	NEW RELEASE
---	-------------

REVISIONS

HZF

CHK

12/25/2017

DATE	
------	--