

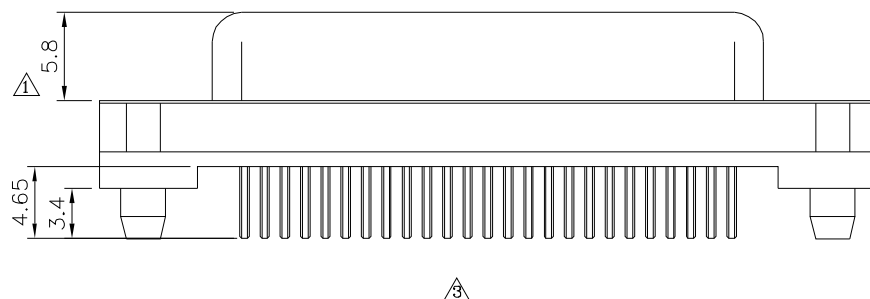


△△ SPECIFICATION

Current Rating:3 Amp
Voltage Rating:250V AC/RMS 60Hz
Contact Resistance:20 Milliohms Max. At 1 Amp DC
Insulation Resistance:1000 Megaohms At 500V DC
Withstand Voltage:1000V AC/RMS 60Hz
For 1 Minute
Insulator:PBT+G.F.(UL94V-0),Black
Contact:Brass,Gold Plated On Contact Area,Tin
Plated On Solder Tails,Over Nickel
Shell:Steel,Tin Plated Over Copper
Clinch Nut:Brass,Nickel Plated
Boardlock:Brass,Tin Plated
RoHS Compliant

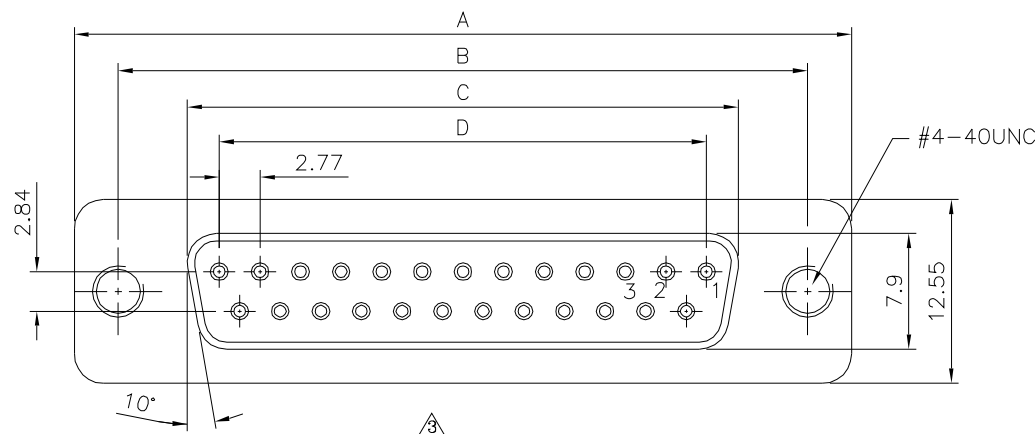

△△	Pin	A	B	C	D
	09	30.81	24.99	16.33	11.08
	15	39.20	33.30	24.70	19.39
	25	53.05	47.04	38.40	33.24
	37	69.40	63.50	54.80	49.86

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10618

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

REV.

B3


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.38 X.* ± 3

.X ± 0.25 .X.* ± 1.0

.XX ± 0.13

UNIT
mm



△ B3

Modify Data

HZF

06/28/2012

△ B2

Modify Data

HZF

06/07/2012

△ B1

Modify Data

INGRID

11/22/2007

△ B1

Modify Data

INGRID

11/22/2007

△ B0

NEW RELEASE

BECKY

06/06/2006

NO.REV.

REVISIONS

CHK

DATE