

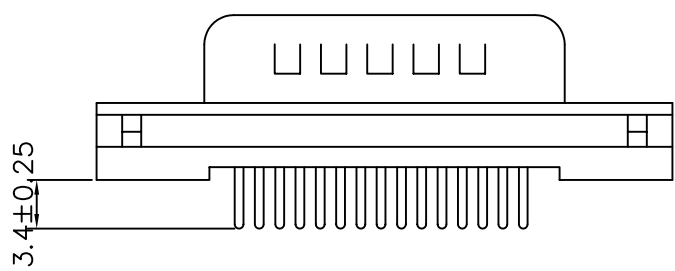


**SPECIFICATIONS**  
 Current Rating:5 AMP  
 Dielectric Withstanding Voltage:AC 1000V  
 For 1 Minute  
 Contact Resistance:30 Milliohms Max.  
 At DC 500V  
 Insulator Resistance:1000 Megohms Min.  
 At DC 500V  
 Operating Temperature:-55°C To +105°C  
 Contact : Brass  
 Housing:PBT & 30% Glass Fiber(UL 94V-0)

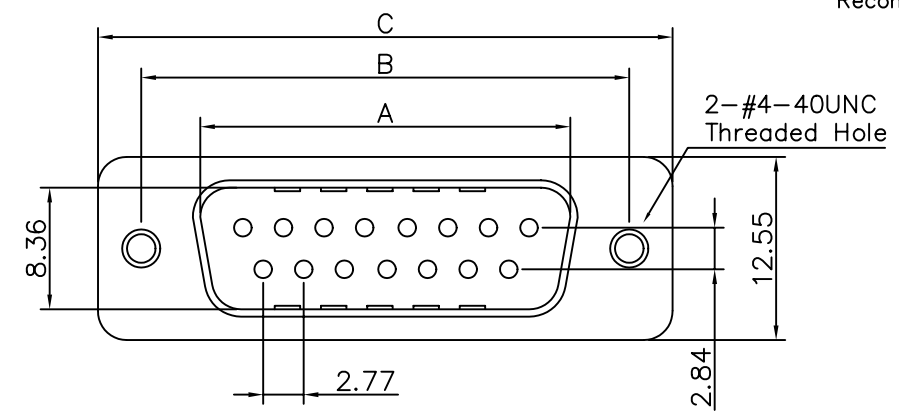

Position	A	B	C
09	16.92	24.99	30.81
15	25.50	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.


DRAWING No.  
 10627

APPROVED BY MEI  
 CHECKED BY BECKY  
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG.

SCALE NONE REV. A0

UNIT mm



NO. REV.

NEW RELEASE REVISIONS

MEI CHK DATE