

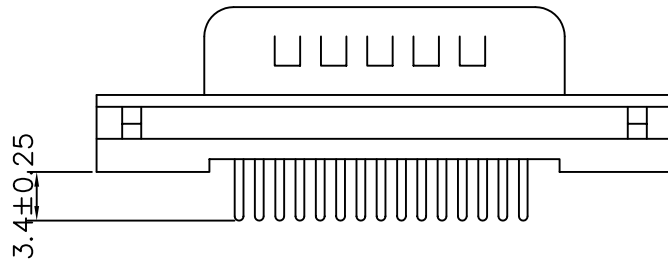


SPECIFICATIONS

Current Rating:5 AMP
 Dielectric Withstanding Voltage:AC 1000V
 For 1 Minute
 Contact Resistance:30 Milliohms Max.
 At DC 500V
 Insulator Resistance:1000 Megohms Min.
 At DC 500V
 Operating Temperature:-55°C To +105°C
 Contact : Brass
 Housing:PBT & 30% Glass Fiber(UL 94V-0)

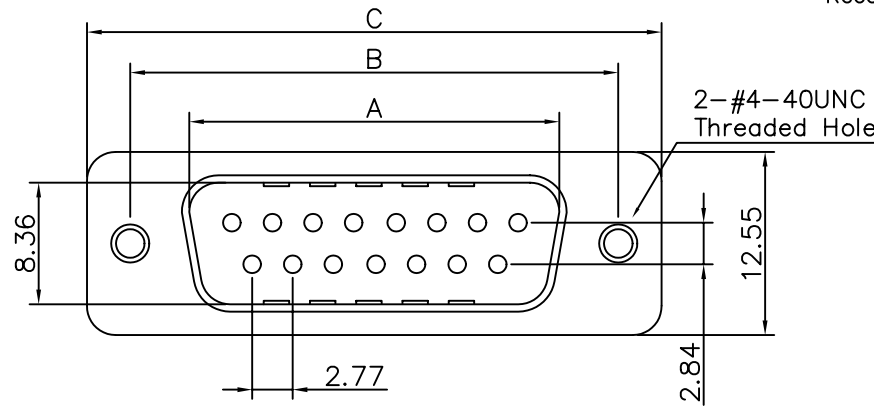

Position	A	B	C
09	16.92	24.99	30.81
15	25.50	33.32	39.14
25	38.96	47.04	53.04
37	55.42	63.50	69.32

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 10629

APPROVED BY MEI
 CHECKED BY BECKY
 DRAWING BY HZF

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

SCALE NONE

REV. A0

UNIT mm

NO. REV.

NEW RELEASE
 REVISIONS

MEI
 CHK DATE