



△△ SPECIFICATION

Current Rating: 3A
 Voltage Rating: 250V AC/RMS 60Hz
 Contact Resistance: 20 Milliohms
 Insulation Resistance: 1000 Megohms At 500V DC
 Dielectric Withstanding Voltage: 1000V AC/RMS 60Hz For 1 Minute
 Operation Temperature: -25°C~+85°C
 Insulator: PBT(UL94V-0), Black
 Contact: Brass, Gold Plated On Contact Area, Tin
 Plated On Solder Tails, Over Nickel
 Shell: Steel, Tin Plated Over Copper
 Boardlock: Brass, Tin Plated
 RoHS Compliant

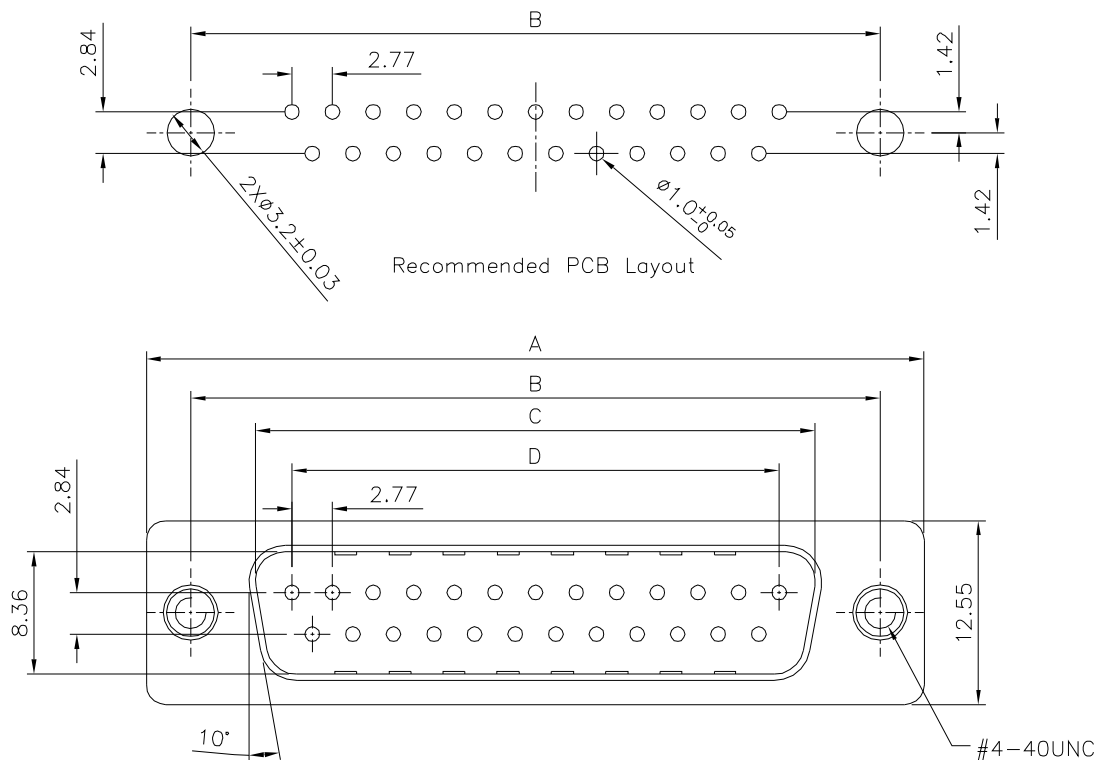

Pin	A	B	C	D
9	30.81	24.99	16.92	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.04	38.96	33.24
37	69.40	63.50	55.42	49.86

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. △

10630

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee

REV.


B4

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.38 X.* ±3*
 .X ±0.25 .X.* ±1.0*
 .XX ±0.13

UNIT

mm



△ B4

Modify Data

HZF

04/10/2026

△ B3

Modify Data

HZF

10/29/2016

△ B2

Modify Data

HZF

11/18/2014

△ B1

Modify Data

INGRID

11/22/2007

△ B0

NEW RELEASE

SHIN

02/07/2007

NO. REV.

REVISIONS

CHK

DATE