




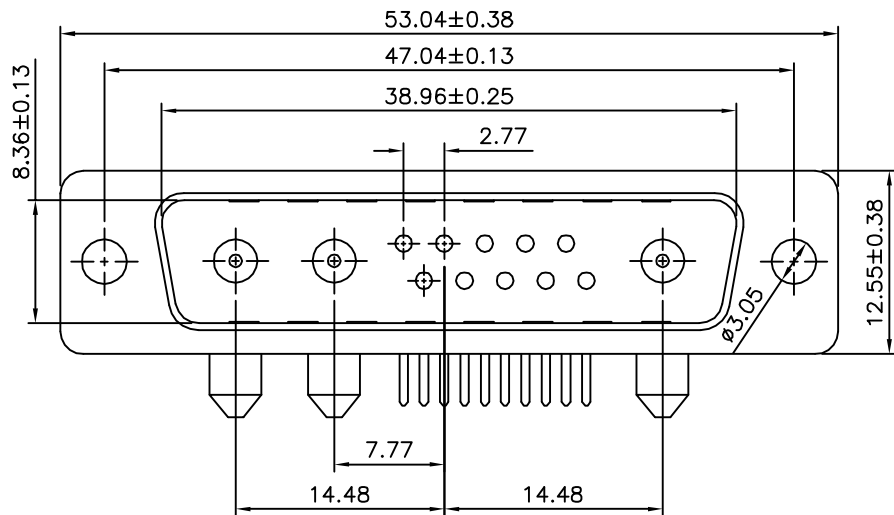


△

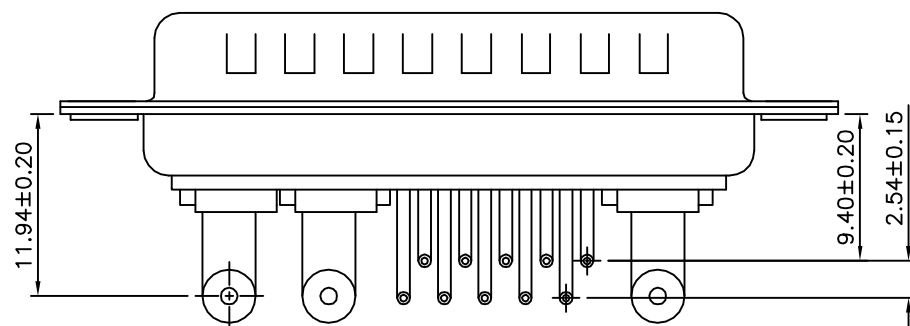

△

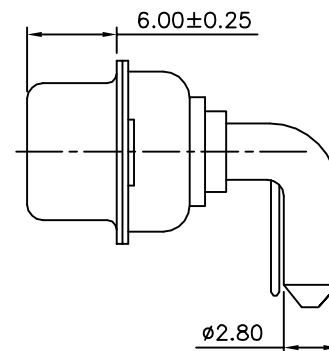

△

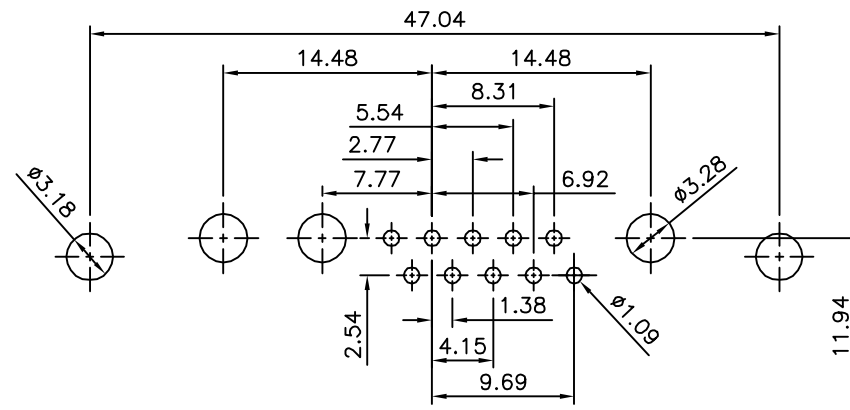

△ Recommended P.C.B. Layout

△ SPECIFICATION

Signal Contact Current Rating:5 Amp
 Power Contact Current Rating:20 Amps
 Dielectric Withstanding Voltage:1000V AC Per Minute
 Contact Resistance:10 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature:−55°C~+125°C
 Insulator:PBT+30%G.F.(UL94V−0),Black
 Signal Contact:Brass,Gold Flash Over Nickel
 Power Contact:Brass,Gold Flash Over Nickel
 Metal Shell:Steel,Tin Plated
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

10640

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


SONG

REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 △ .X ±0.3
 .XX ±0.3
 ANG. ±2°

UNIT
 mm



△ A1

Modify Data

HZF

08/08/2012

△ A0

NEW RELEASE

NO. REV.

REVISIONS

CHK

DATE