




PCB LAYOUT

SPECIFICATIONS:

High Power Contact Current Rating :20 Amps
 High Power Contact Resistance : 2.7 Milliohms Max.
 Dielectric Withstanding Voltage : 1000 V AC for 1 Minute
 Insulation Resistance : 5000 Megohms Min.
 Temperature Rating : -55°C ~ +125°C
 Shell : Steel Material, Tin Finished
 Connector Insulator : PBT Thermoplastic, 30% Glass Filled,
 UL 94V-0 Rated, Black Color
 High Power Contact Material: Brass, 15u" Gold Plated

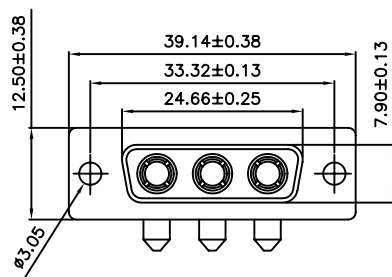

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 10641

APPROVED BY MEI
 CHECKED BY BECKY
 DRAWING BY HZF

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X
 .XX ±0.3
 ANG. ±2°

SCALE NONE

REV. A0

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
A0		NEW RELEASE	MEI	