



SPECIFICATION


Current Rating:3.0 Amps/Contact Max.
 Withstanding Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max./Contact
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operating Temperature:-55°C~+105°C
 Housing:PA6T+30%G.F(UL94V-0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

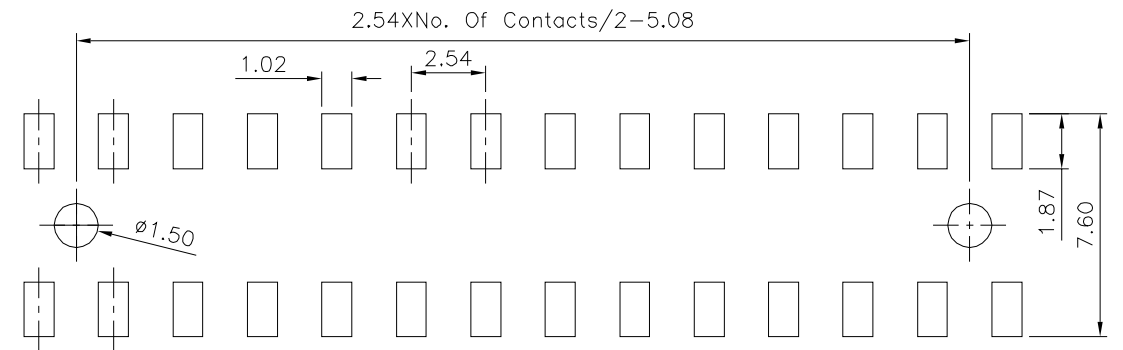


△ Recommended P.C.B. Layout

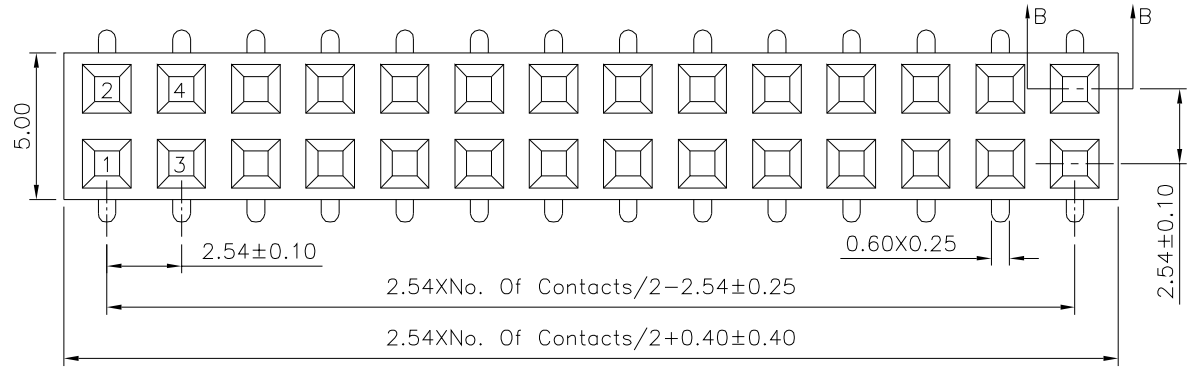

△

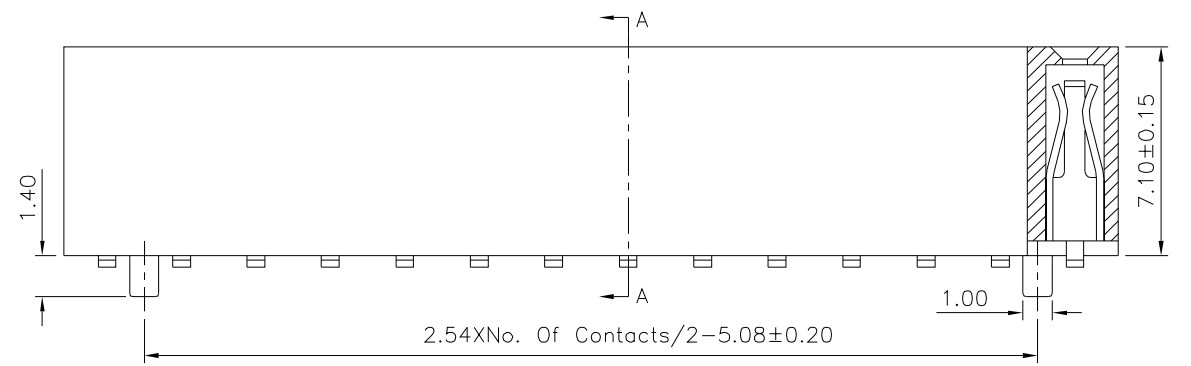

△ Section B-B



Section A-A

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X ±0.50 XX ±0.30 XXX ±0.20 XXXX ±0.10 ANG. ±5°
10710		MEI		
		CHECKED BY HZF		
		DRAWING BY CYP		
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	11/14/2017
△ A0		NEW RELEASE	HZF	09/17/2013