



SPECIFICATION

Current Rating:3.0 Amps/Contact Max.
Withstanding Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operating Temperature:-55°C~+105°C
Housing:PA6T+30%G.F(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant


2.54XNo. Of Contacts/2-5.08

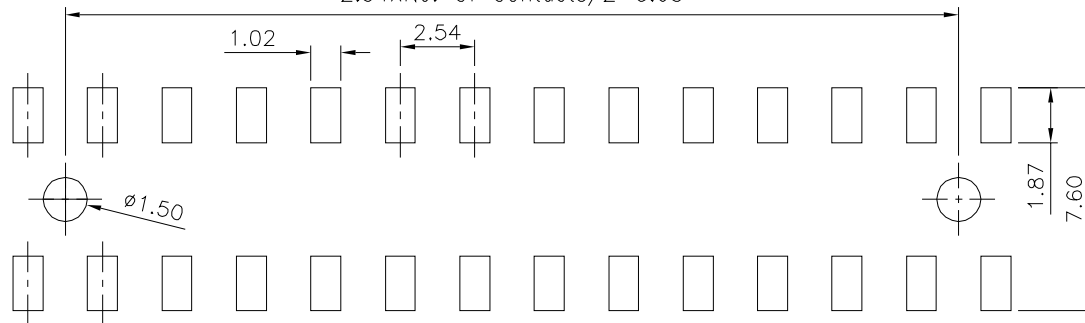


Recommended P.C.B. Layout

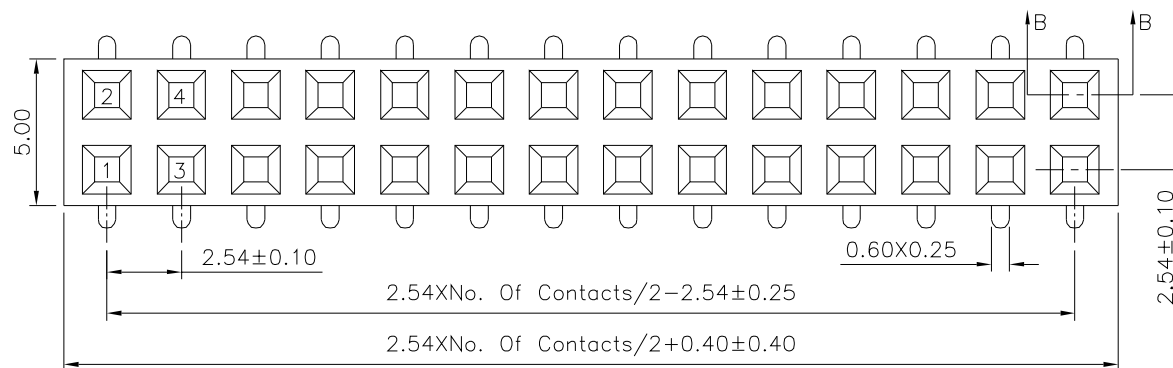

Section B-B

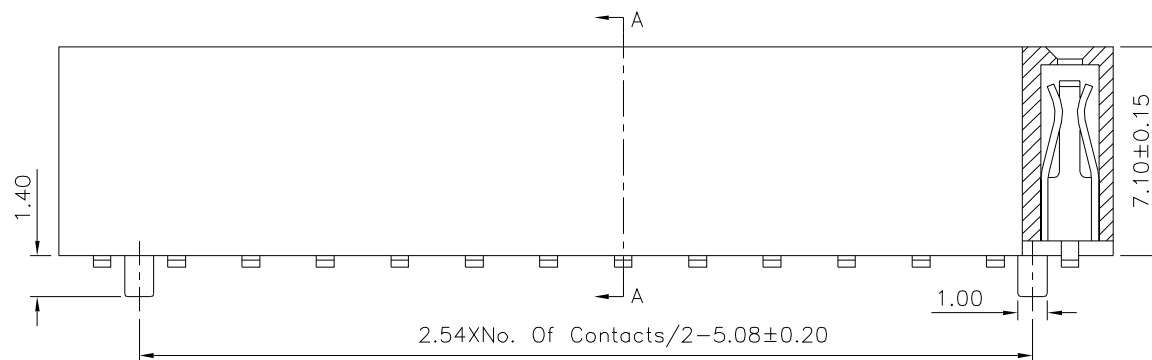

Section B-B



Section A-A

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10724

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
XX ±0.30
XXX ±0.20
XXX ±0.10
ANG. ±5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	11/14/2017
△ A0		NEW RELEASE	HZF	09/17/2013

SCALE

NONE

REV.

A1