

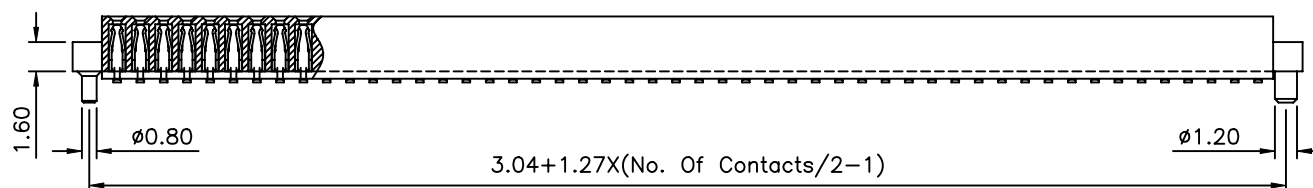
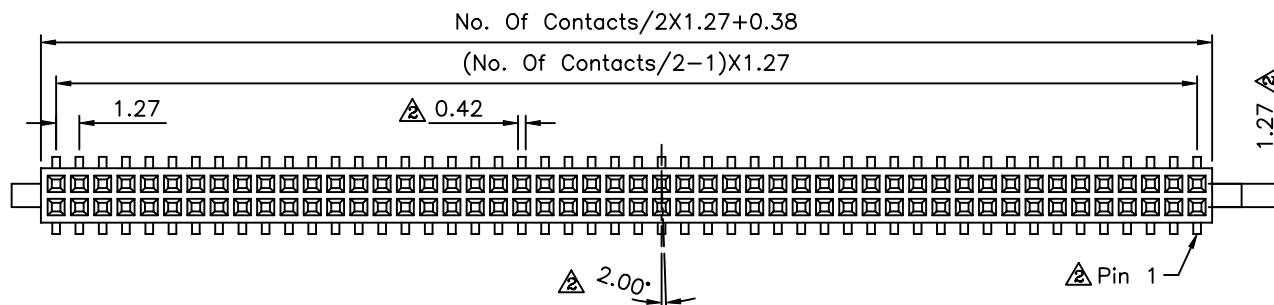


△ SPECIFICATION

Current Rating:1 Amp
 Insulation Resistance:5000 Megaohms Min.
 Dielectric Withstanding:AC 500V
 Operation Temperature:-40°C~+105°C
 Max. Processing Temperature:
 230° For 30~60 Seconds
 (260° For 10 Seconds)
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 Housing:LCP(UL94V-0),Black
 No. Of Contacts:06~100 Contacts
 RoHS Compliant

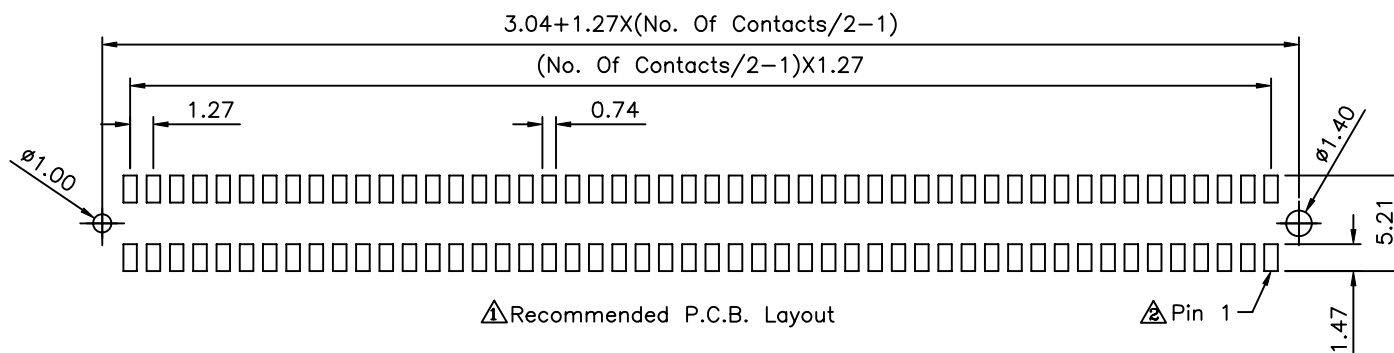

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

10877

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

QQJ

SCALE

NONE


REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

△ X. ±0.20
 .X ±0.15
 .XX ±0.10
 .XXX ±0.05

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2	Modify Data	HZF	11/02/2010	
△ A1	Modify PCB Layout	BECKY	04/11/2006	
△ A0	NEW RELEASE	BECKY	04/06/2005	