

## SPECIFICATIONS :

50 Ohms BNC Vertical PCB Mount Jack

1.Center Contact: Bronze,Gold Plated

2.Body: Zinc Alloy,Nickel Plated

3.Insulator: PE-606




4.Mounting Post: Bronze,Tin Plated

5.Solder Tail: Copper Wire,Tin Plated




6.Washer : Steel,Nickel Plated

7.Nut: Brass,Nickel Plated

8.Housing : PBT (UL 94V-0)

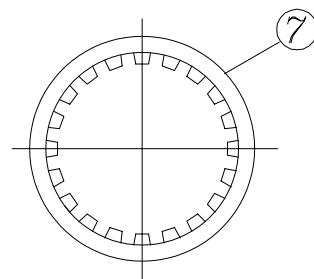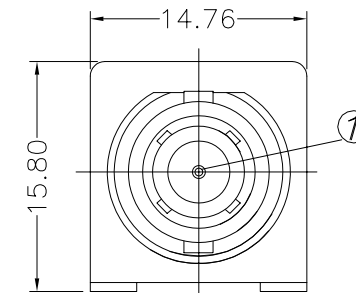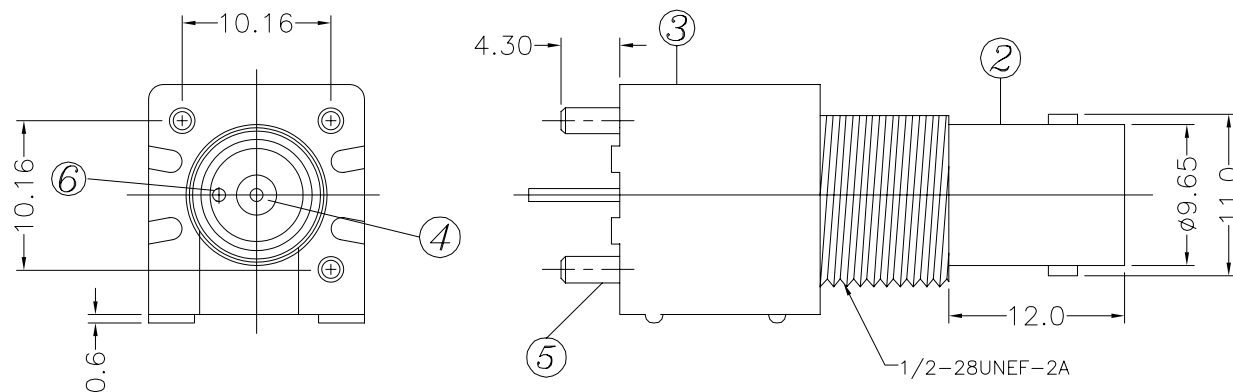

LOCK WASHER

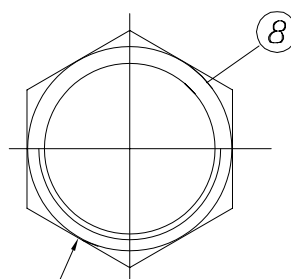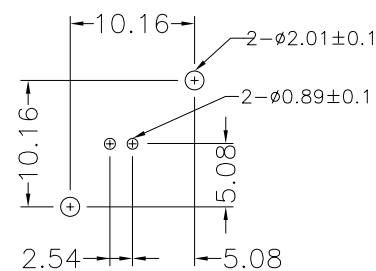1/2-28UNEF-2B  
CLAMP NUTRecommended PC Board layout  
Without mounting postsRecommended mounting hole  
maximum panel thickness:5.5mm

4UCON

元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

10906  
3119EJ7E09

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG.

SCALE

NONE

REV.

A0

UNIT

mm

UNIT

mm

NO. REV.

A0

NEW RELEASE

REVISIONS

MEI

CHK

DATE