

SPECIFICATIONS:

SHELL : STEEL MATERIAL, FRONT SHELL NICKEL FINISHED
BACK SHELL TIN FINISHED
DIMPLES ON PLUG ONLY

INSULATOR : PBT THERMOPLASTIC, 30% GLASS
FILLED, UL 94V-0 RATED, BLACK COLOR

CONTACT MATERIAL : BRASS

CONTACT FINISH : FULL GOLD FLASH


CONTACT CURRENT RATING : 5.0 AMPS

CONTACT RESISTANCE : 30 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.

INSULATION RESISTANCE : 5000 MEGOHMS MIN.

TEMPERATURE RATING : -55°C ~ +105°C

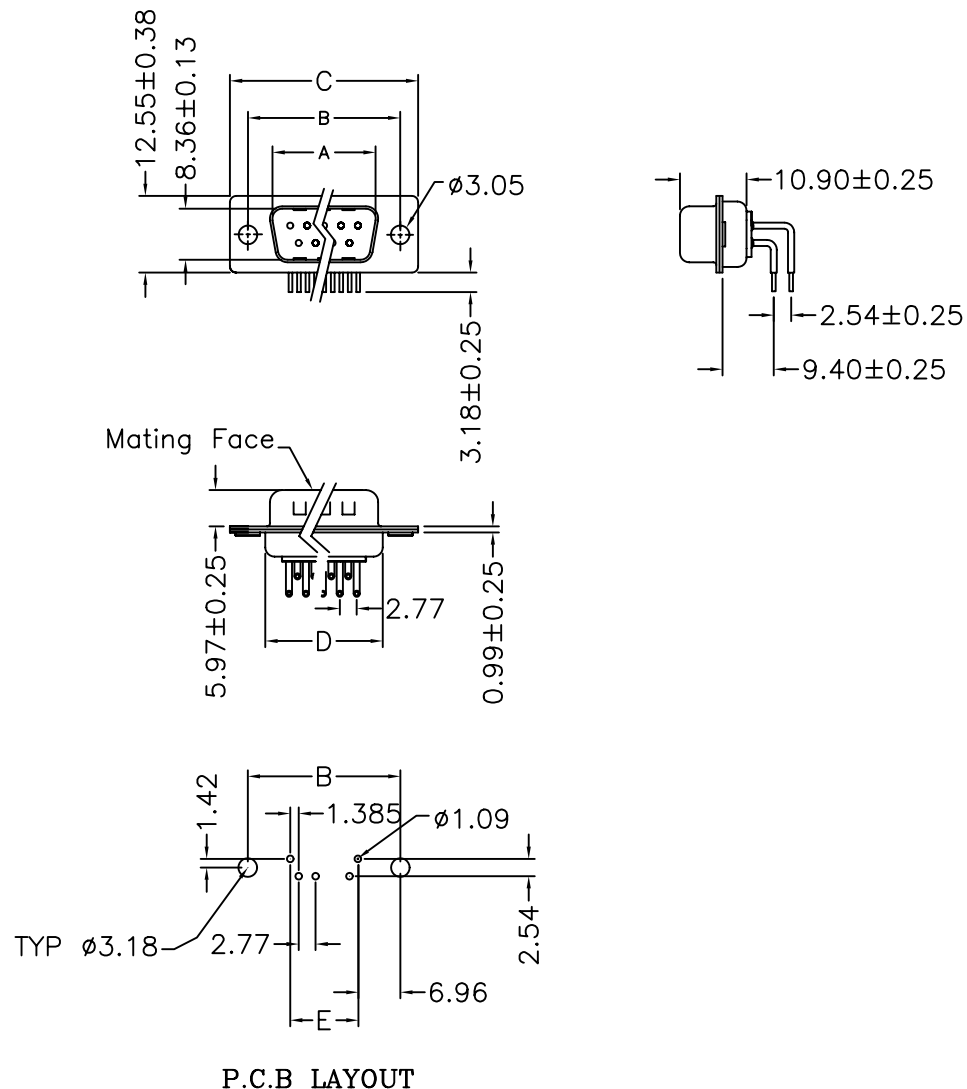

No. of Contact	A±0.25	B±0.13	C±0.38	D±0.25	E
09	16.92	24.99	30.81	19.28	11.08
15	25.25	33.32	39.14	27.51	19.39
25	38.96	47.04	53.04	41.28	33.24
37	55.42	63.50	69.32	57.71	49.86

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

10917

APPROVED BY

MEI

CHECKED BY

BECKY

DRAWING BY

HZF

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X

.XX ±0.13

ANG. ±2°

UNIT
mm



NO. REV.

0

A0

NEW RELEASE

REVISIONS

MEI

CHK

DATE

SCALE

NONE

REV.

A0