

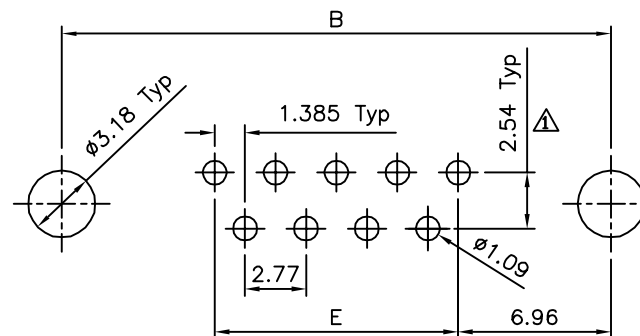
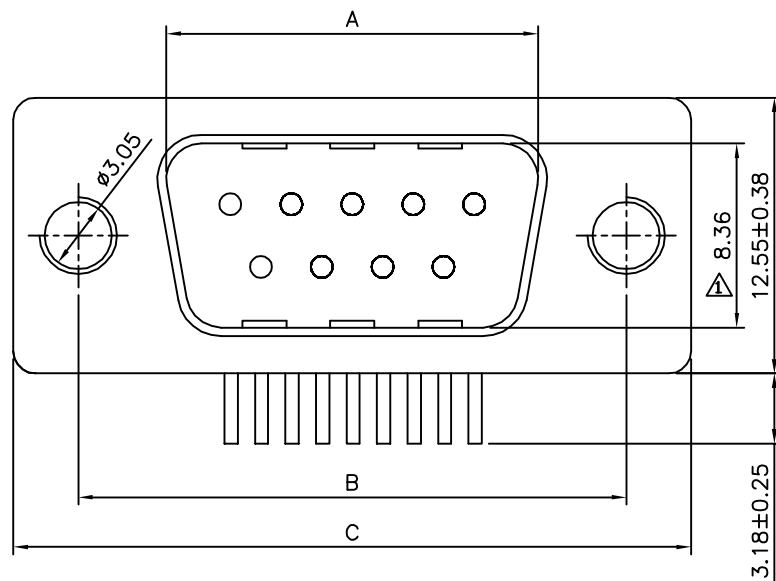


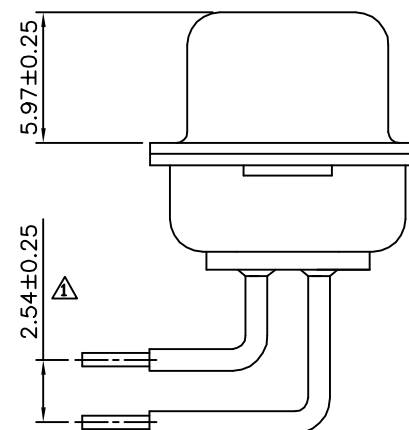

Recommended P.C.B. Layout

△ SPECIFICATION

Withstand Voltage:1000V AC Per Minute
 Contact Resistance:10 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operation Temperature Range:-55°C~+125°C
 Insulator:PBT+30%G.F.(UL94V-0)
 △ Contact:Brass,Gold Flash Over Nickel
 Metal Shell:Steel,Tin Plated
 Metal Bracket:Steel,Nickel Plated
 Boardlock:Brass,Nickel Plated
 RoHS Compliant

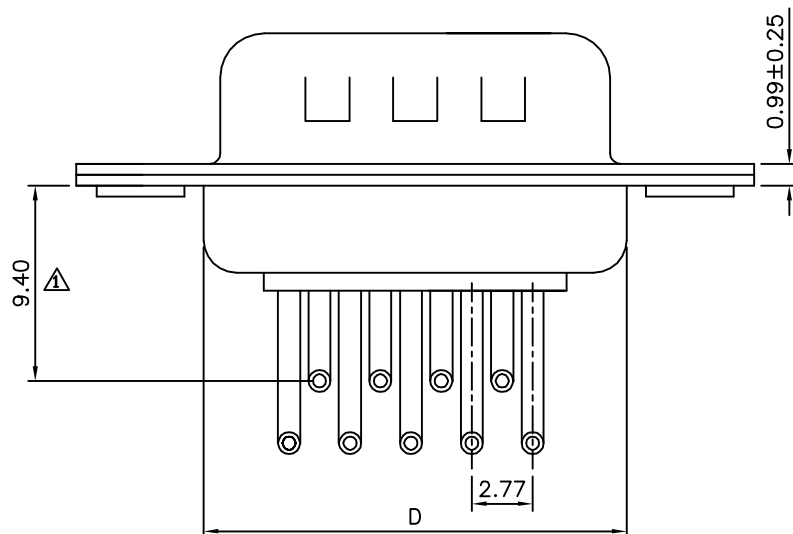

Pin	A±0.25	B±0.13	C±0.38	D±0.25	E±0.25	△
09	16.92	24.99	30.81	19.28	11.08	
15	25.25	33.32	39.14	27.51	19.39	
25	38.96	47.04	53.04	41.28	33.24	
37	55.42	63.50	69.32	57.71	49.86	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

10928

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

△ .XX ±0.3
 .XXX ±0.3
 ANG. ±2°

SCALE

NONE

REV.

A2

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Spec.	HZF	05/21/2014
△	A1	Modify Data	HZF	06/03/2011
△	A0	NEW RELEASE		