

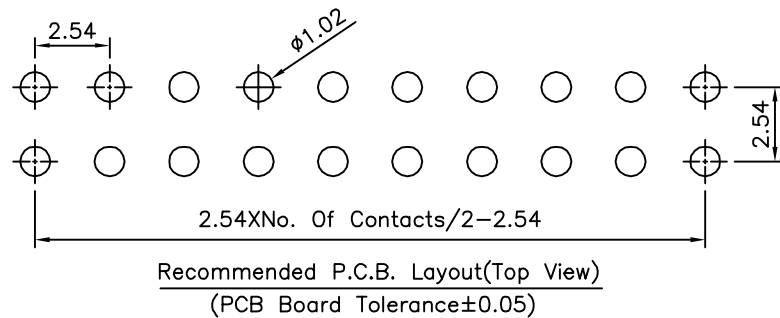
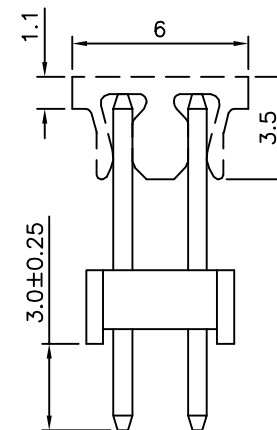


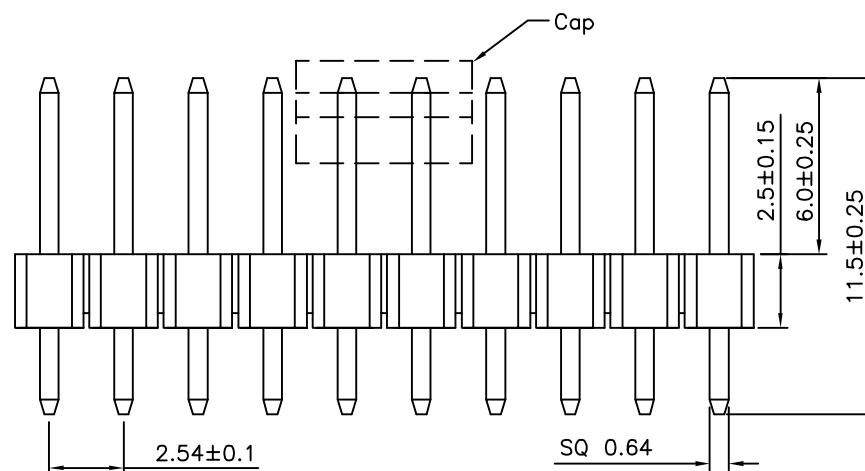

SPECIFICATION

Current Rating:3 Amp
Withstand Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

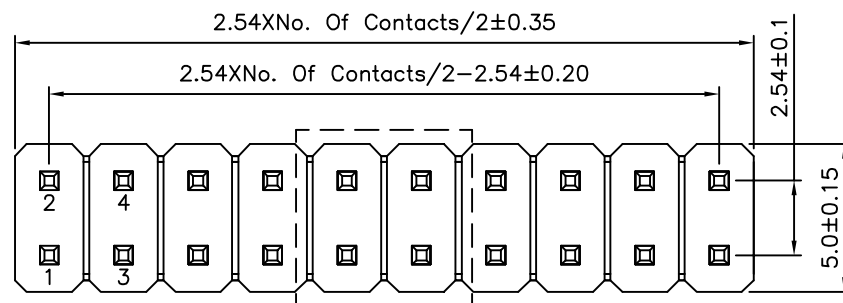

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

10967

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

	REV.
--	------

AO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X. ± 0.25	X.* $\pm 2^\circ$
.X ± 0.20	.X* $\pm 1.5^\circ$
.XX ± 0.15	.XX* $\pm 1^\circ$
.XXX ± 0.10	.XXX* $\pm 0.5^\circ$
UNIT mm	

0	AO
NO.	REV.

	NEW RELEASE
1.	REVISIONS

HZF
CHK

06/08/2015
DATE