


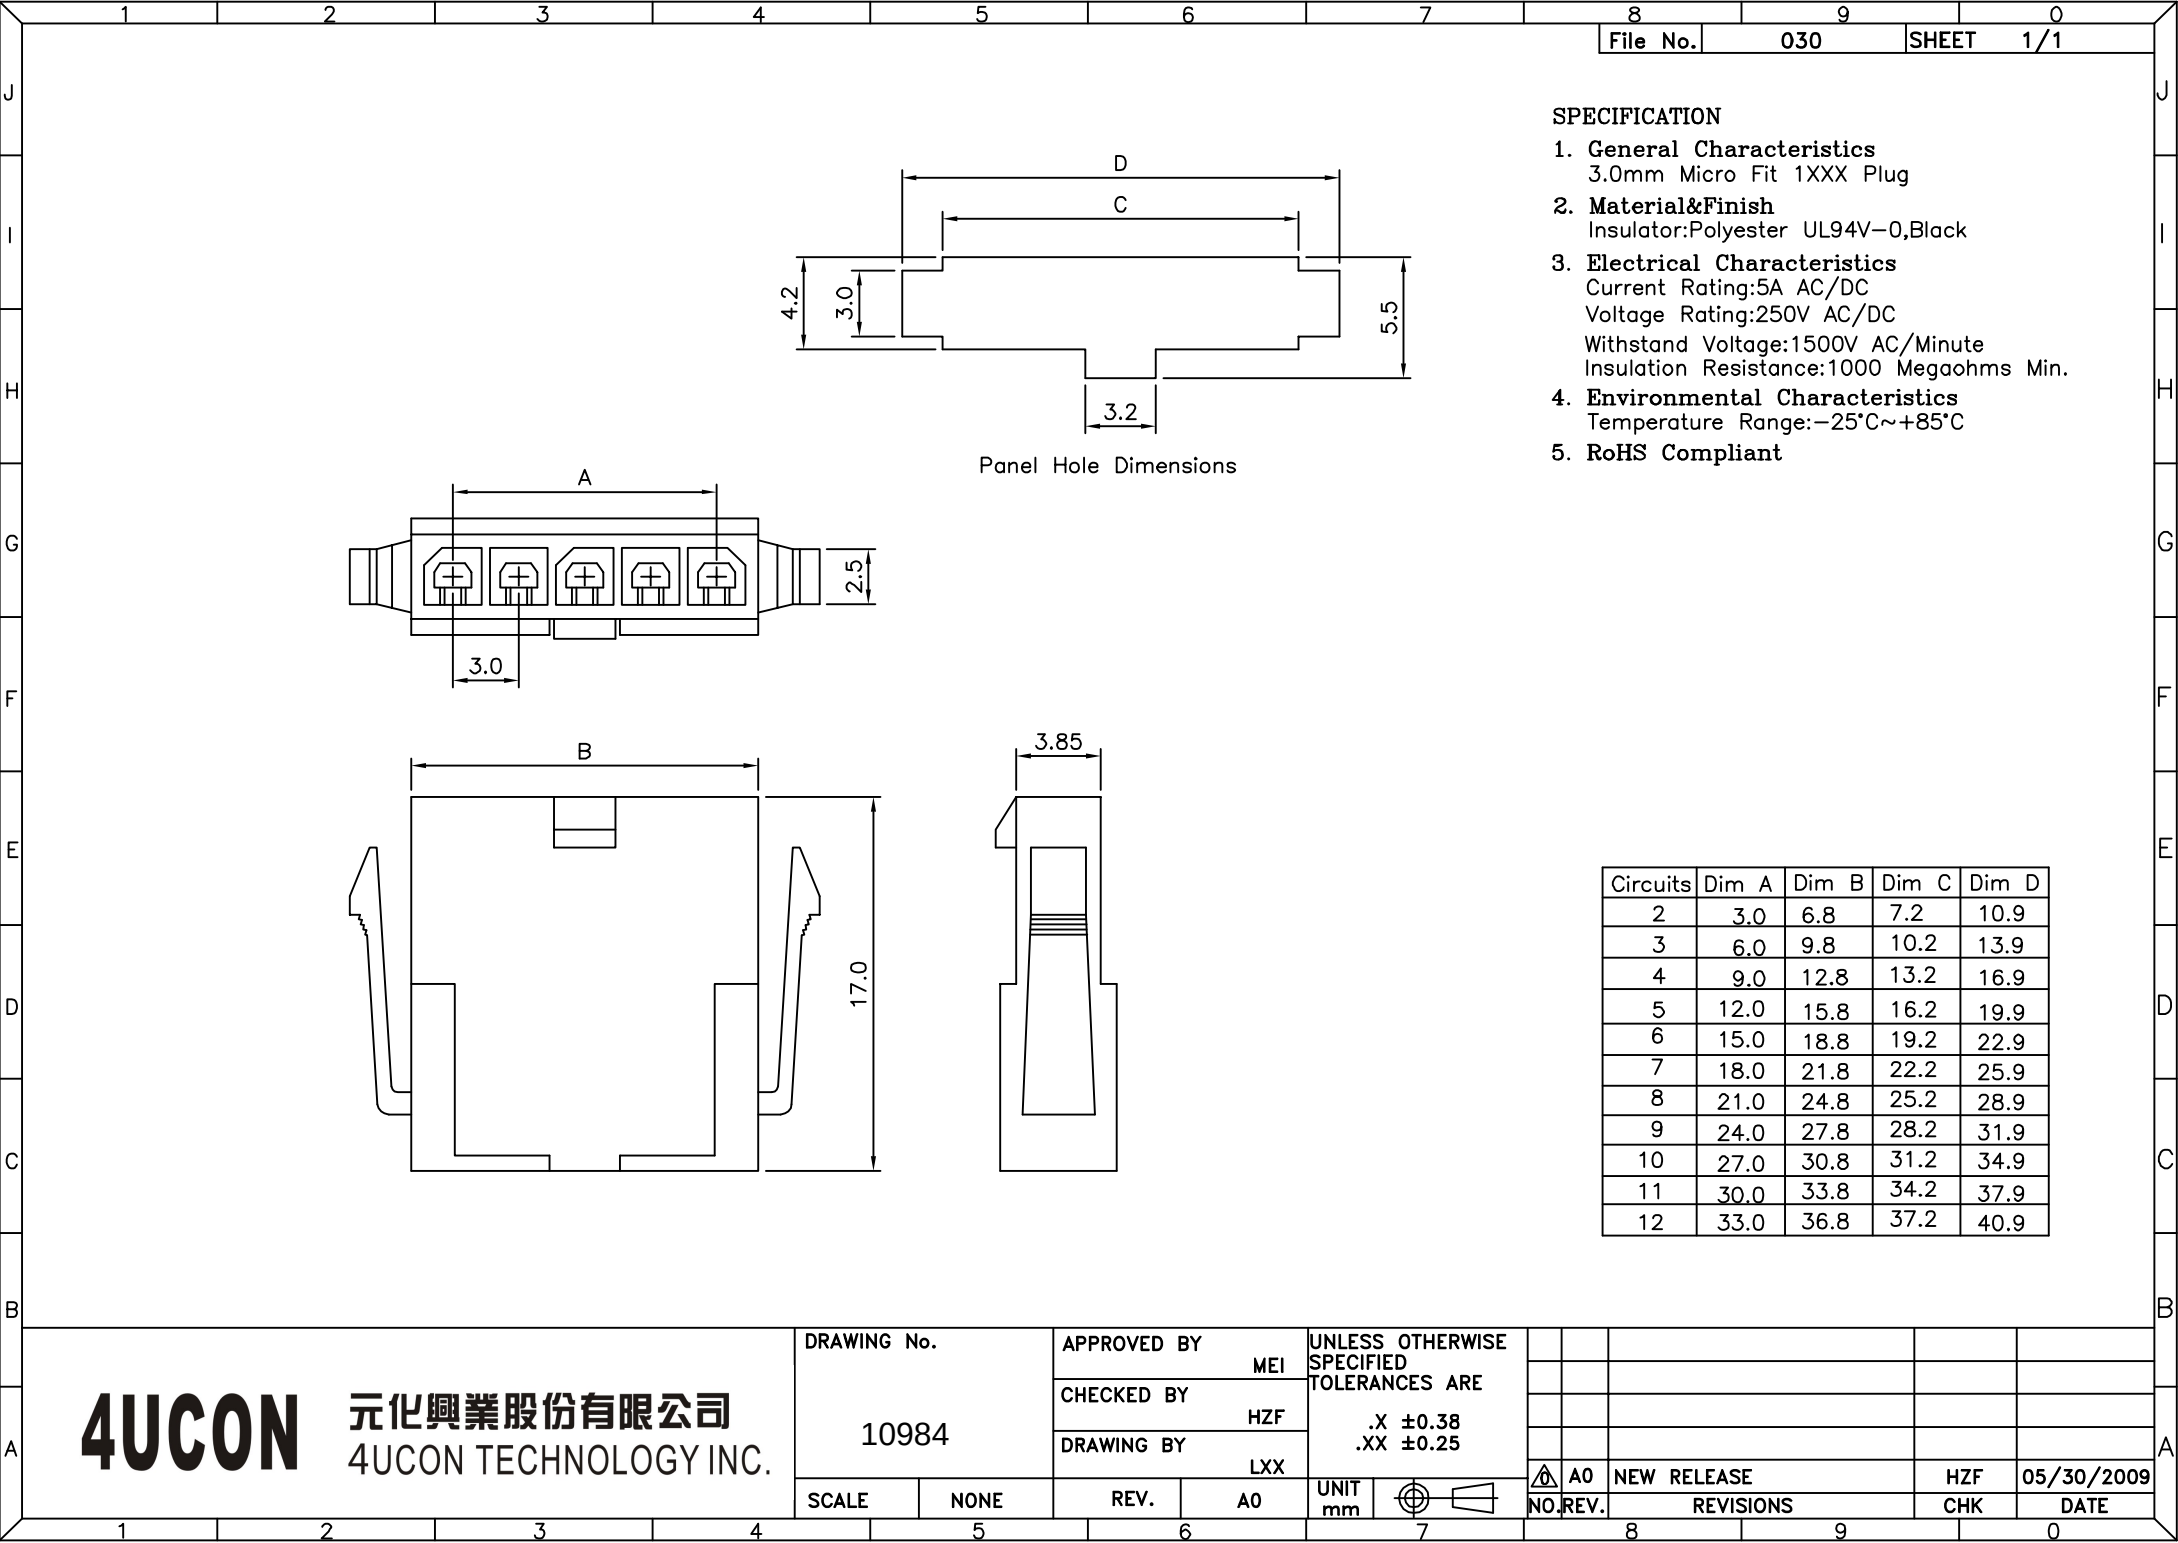

- SPECIFICATION**
- 1. **General Characteristics**
3.0mm Micro Fit 1XXX Plug
 - 2. **Material&Finish**
Insulator:Polyester UL94V-0,Black
 - 3. **Electrical Characteristics**
Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Withstand Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
 - 4. **Environmental Characteristics**
Temperature Range:-25°C~+85°C
 - 5. **RoHS Compliant**

Circuits	Dim A	Dim B	Dim C	Dim D
2	3.0	6.8	7.2	10.9
3	6.0	9.8	10.2	13.9
4	9.0	12.8	13.2	16.9
5	12.0	15.8	16.2	19.9
6	15.0	18.8	19.2	22.9
7	18.0	21.8	22.2	25.9
8	21.0	24.8	25.2	28.9
9	24.0	27.8	28.2	31.9
10	27.0	30.8	31.2	34.9
11	30.0	33.8	34.2	37.9
12	33.0	36.8	37.2	40.9

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 10984		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25	
		MEI			
		CHECKED BY			
		HZF			
		DRAWING BY			
		LXX			
SCALE	NONE	REV.	A0	UNIT mm	

NO.	REV.	NEW RELEASE	HZF	05/30/2009
		REVISIONS	CHK	DATE