File No. 182 SHEET 1/1

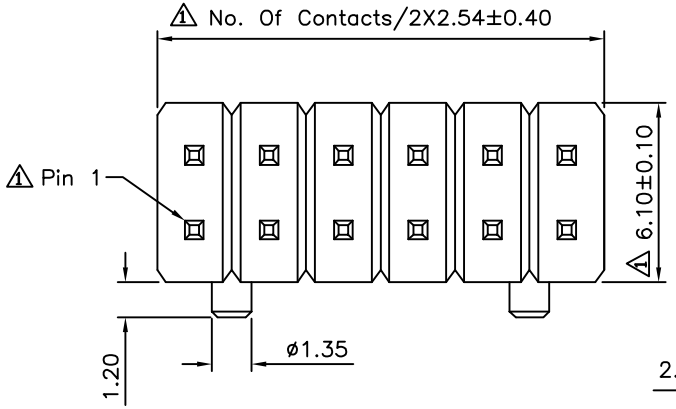

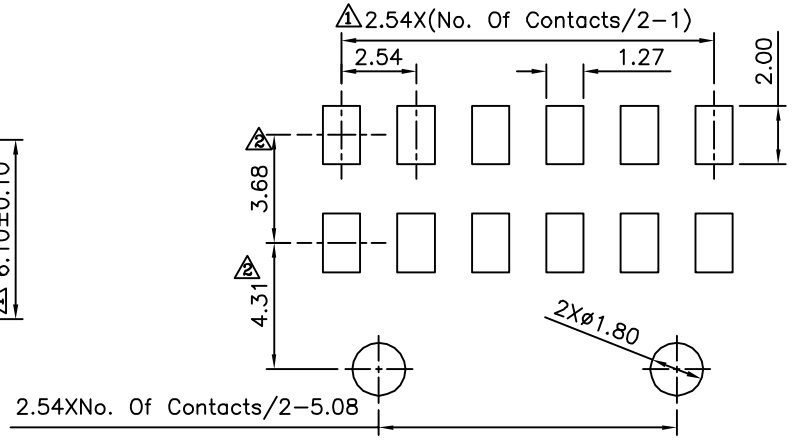

Recommended P.C.B. Layout

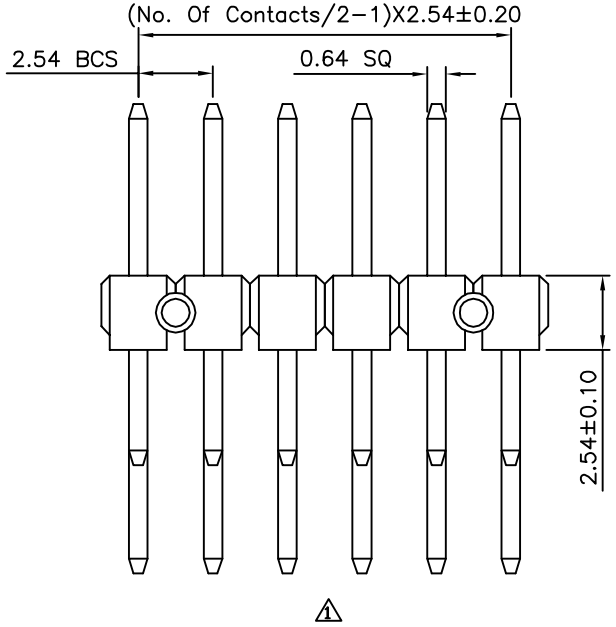

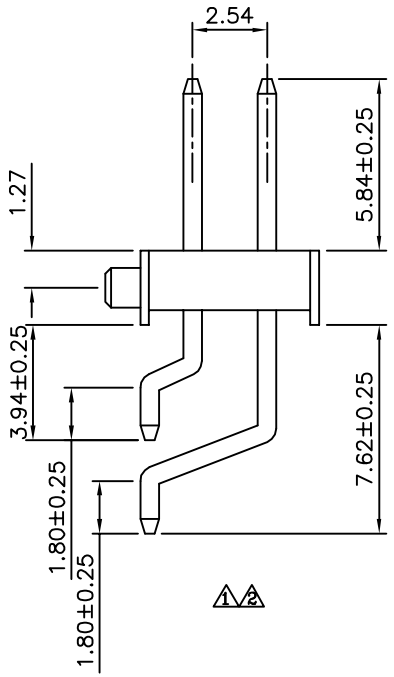

1 SPECIFICATION

Current:3A
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstanding Voltage:1000V AC RMS
Operation Temperature:-55°C~+105°C
Housing:PA6T(UL94V-0),Black
Contact:Copper Alloy,Gold Flash
No. Of Contacts:06~80 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	10987
APPROVED BY	EMILY
CHECKED BY	HZF
DRAWING BY	WSS
SCALE	NONE
REV.	A2
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	.X ±0.38 .XX ±0.25 ANG. ±5°
UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
2	A2	Modify Data	HZF	06/10/2011
1	A1	Modify Data	HZF	09/10/2010
0	A0	NEW RELEASE	HZF	09/15/2006