

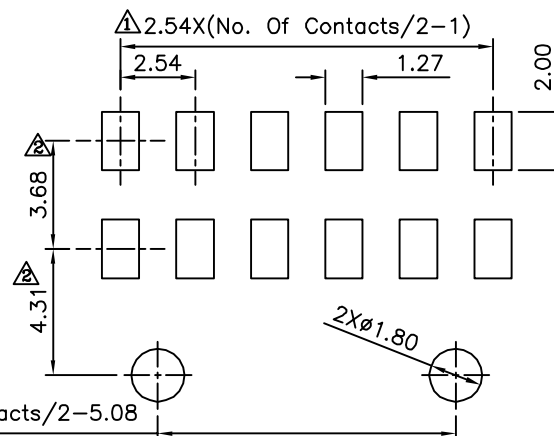
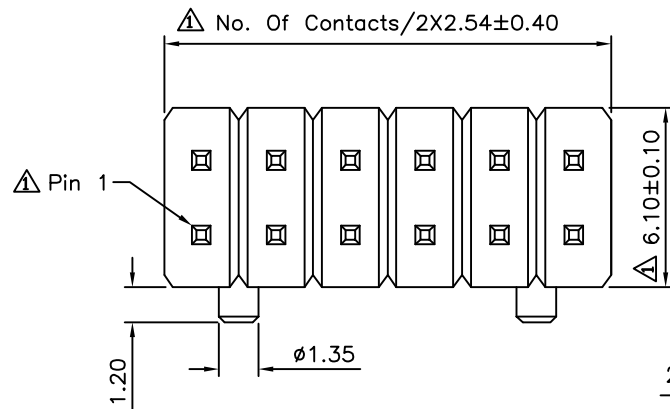


△ SPECIFICATION

Current:3A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC RMS
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Copper Alloy,Gold Flash
 No. Of Contacts:06~80 Contacts
 RoHS Compliant

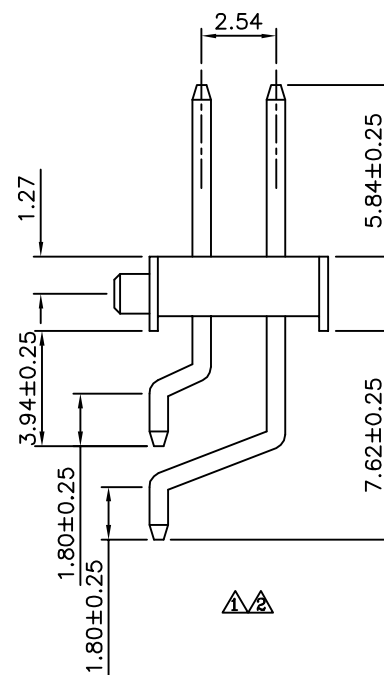

Recommended P.C.B. Layout

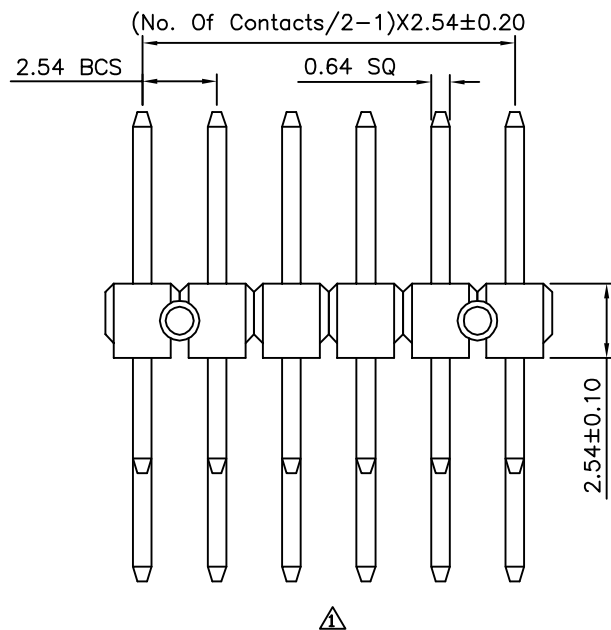

DRAWING No.

10988

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

SCALE

NONE

REV.

A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2	Modify Data	HZF	06/10/2011	
△ A1	Modify Data	HZF	09/10/2010	
△ A0	NEW RELEASE	HZF	09/15/2006	

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.