

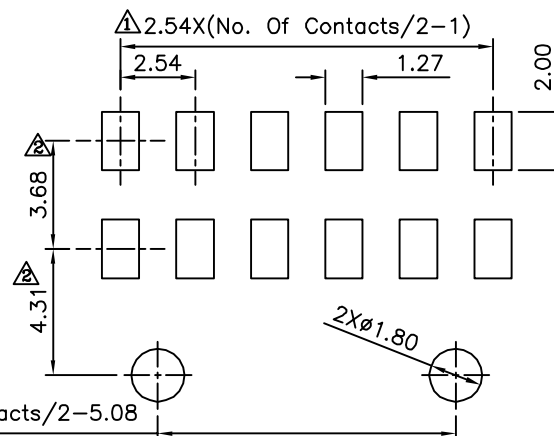
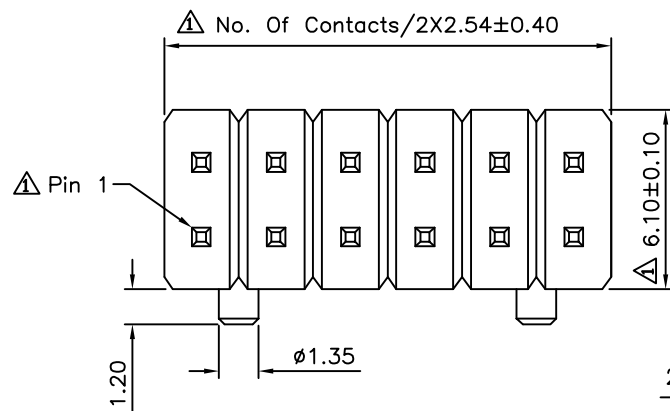


△ SPECIFICATION

Current:3A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC RMS
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Copper Alloy,Gold Flash
 No. Of Contacts:06~80 Contacts
 RoHS Compliant

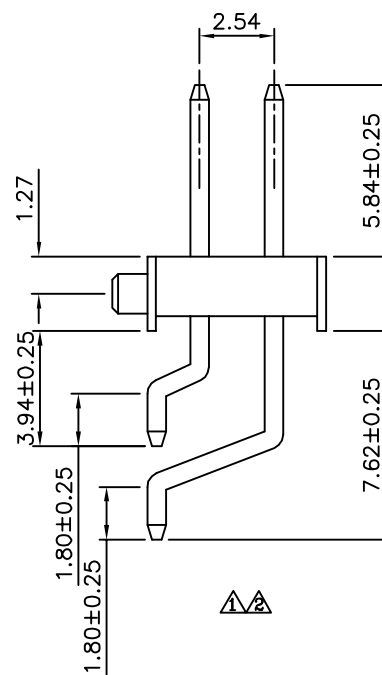

Recommended P.C.B. Layout

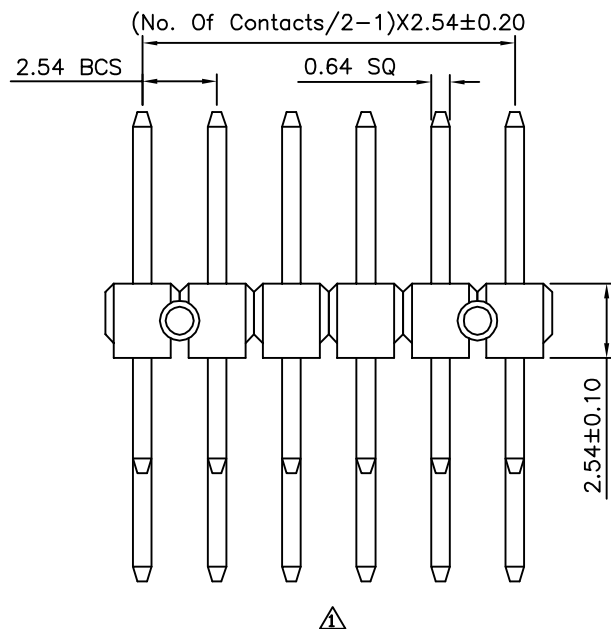

DRAWING No.

10991

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

REV.

A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

UNIT



NO. REV.

REVISIONS

CHK

DATE

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

△ A2	Modify Data	HZF	06/10/2011
△ A1	Modify Data	HZF	09/10/2010
△ A0	NEW RELEASE	HZF	09/15/2006