

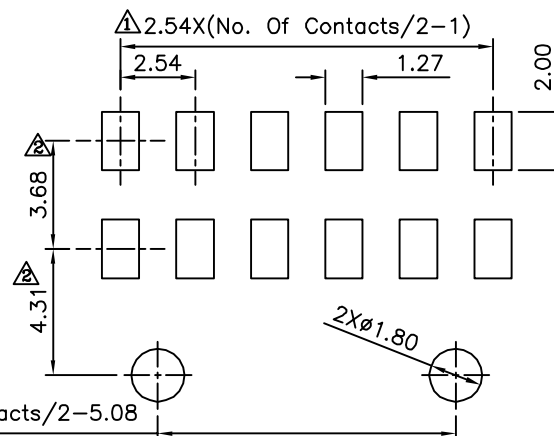
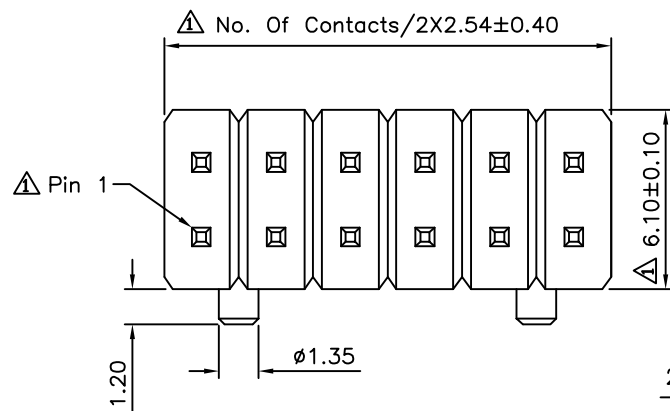


# △ SPECIFICATION

Current:3A  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Withstanding Voltage:1000V AC RMS  
 Operation Temperature:-55°C~+105°C  
 Housing:PA6T(UL94V-0),Black  
 Contact:Copper Alloy,Gold Flash  
 No. Of Contacts:06~80 Contacts  
 RoHS Compliant

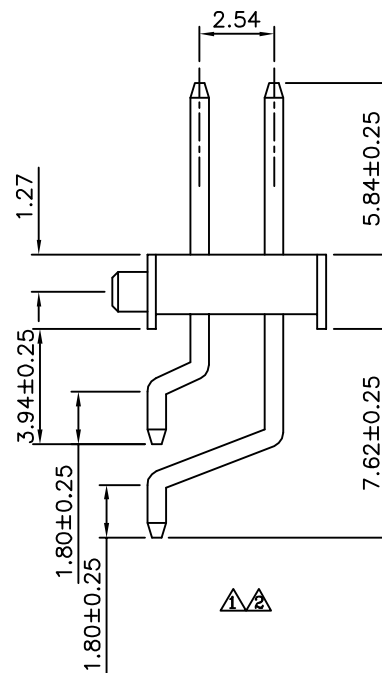

Recommended P.C.B. Layout

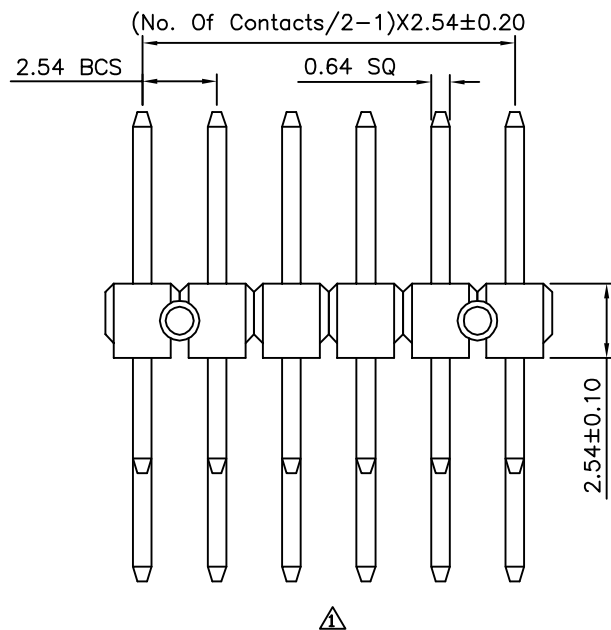

**4UCON** 元化興業股份有限公司  
 4UCON TECHNOLOGY INC.

DRAWING No.

11004

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

WSS

REV.

A2

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 ANG. ±5°

UNIT  
 mm



|                                                                                       |     |             |     |            |
|---------------------------------------------------------------------------------------|-----|-------------|-----|------------|
|                                                                                       |     |             |     |            |
|                                                                                       |     |             |     |            |
|  | A2  | Modify Data | HZF | 06/10/2011 |
|  | A1  | Modify Data | HZF | 09/10/2010 |
|  | A0  | NEW RELEASE | HZF | 09/15/2006 |
| NO                                                                                    | REV | REVISIONS   | CHK | DATE       |