

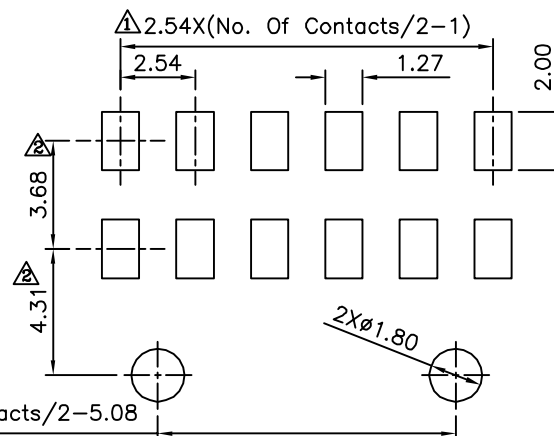
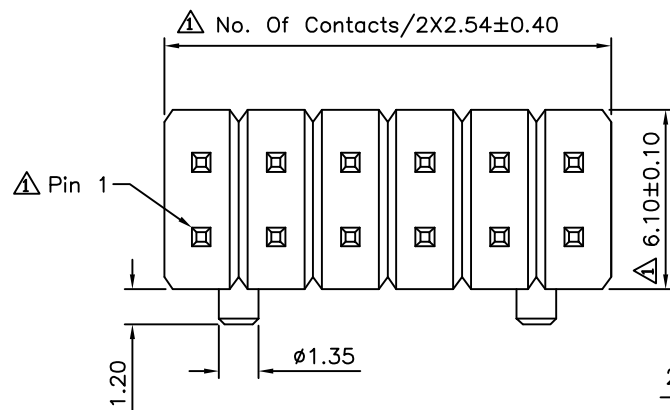


△ SPECIFICATION

Current:3A
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC RMS
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Copper Alloy,Gold Flash
 No. Of Contacts:06~80 Contacts
 RoHS Compliant

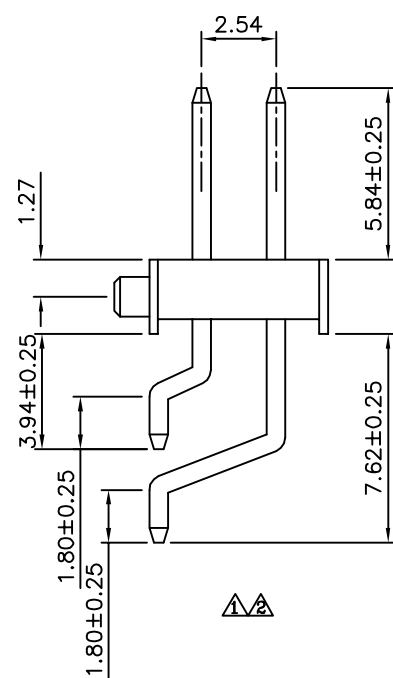

Recommended P.C.B. Layout

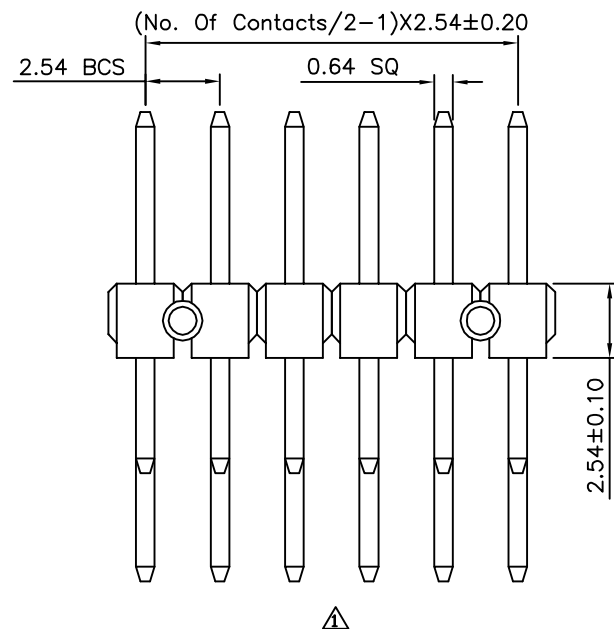

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

11005

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


WSS

REV.

A2

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2	Modify Data	HZF	06/10/2011	
△ A1	Modify Data	HZF	09/10/2010	
△ A0	NEW RELEASE	HZF	09/15/2006	