
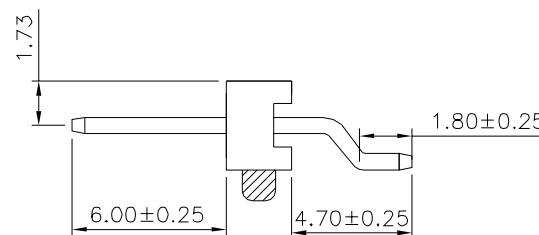
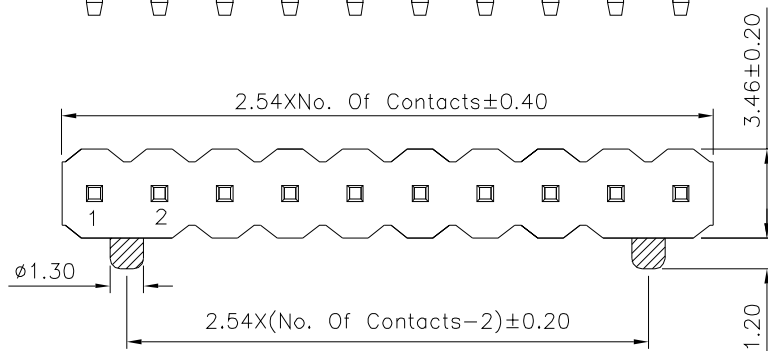
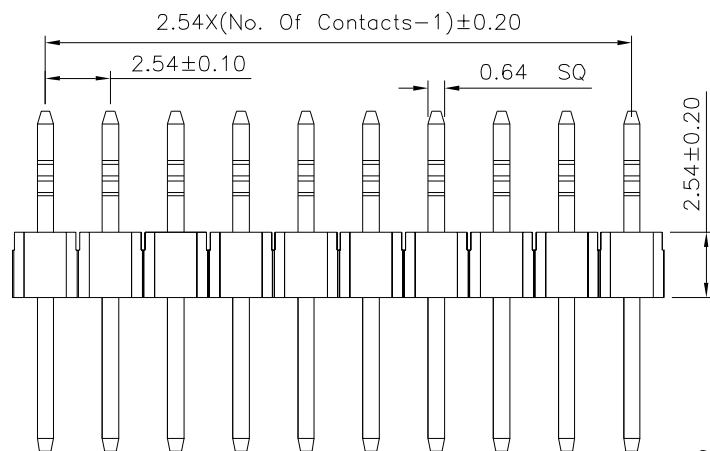
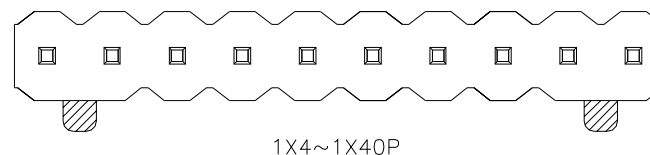




# SPECIFICATION

Current:3A  
Withstanding Voltage:1000V AC/Minute  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operating Temperature:-40°C~+105°C  
Insulator:PA6T(UL94V-0),Black  
Contact:Brass,Gold Flash Over Nickel  
No. Of Contacts:02~40 Contacts  
RoHS Compliant

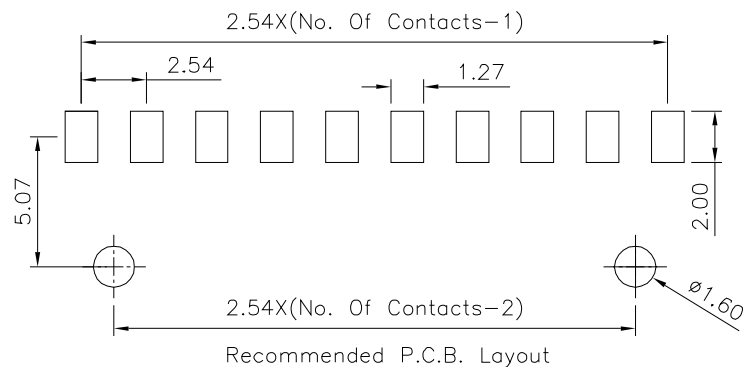

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

11044

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

B0

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE  
.X ±0.38  
.XX ±0.25  
.XXX ±0.05

UNIT  
mm



NO. REV.

REVISIONS

CHK

DATE

BO

NEW RELEASE

HZF

02/13/2025