
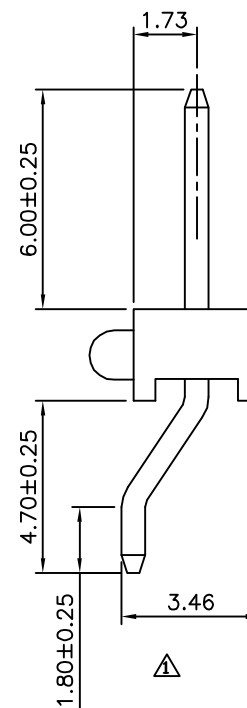
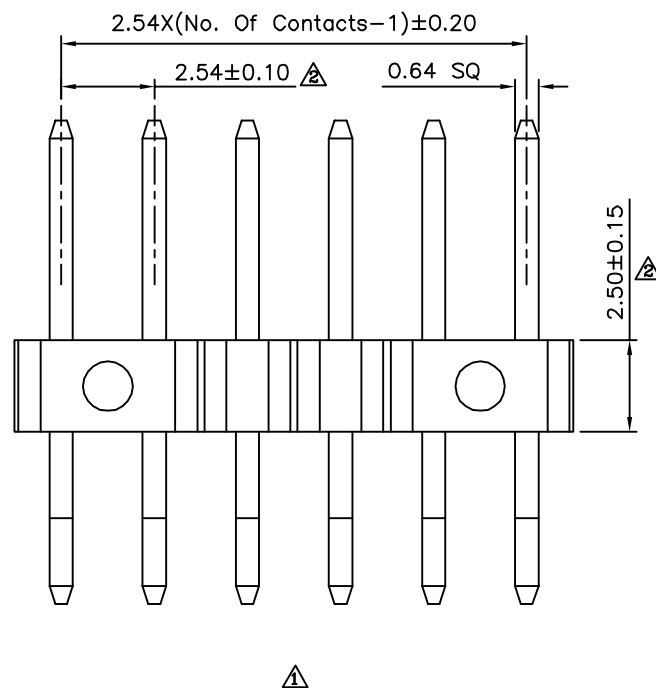
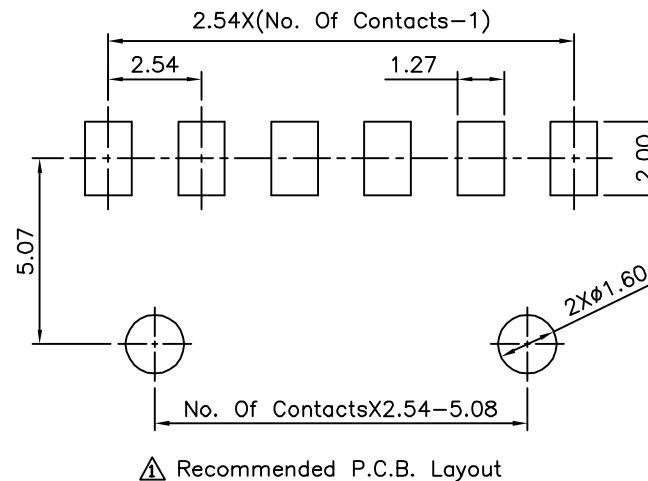


△ SPECIFICATION

Current:3A
Withstanding Voltage:1000V AC RMS
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-55°C~+105°C
Housing:PA6T(UL94V-0),Black
△ Contact:Copper Alloy,Gold Flash Over Nickel
No. Of Contacts:03~40 Contacts
RoHS Compliant

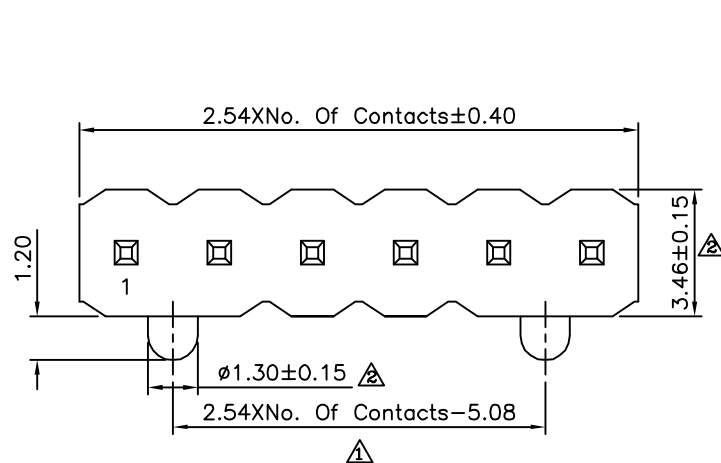

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

11045

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

SCALE

NONE

REV.

A2


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.38

.XX ±0.25

ANG. ±5°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△ A2	Modify Data	HZF	11/22/2012	
△ A1	Modify Data	HZF	12/13/2010	
△ A0	NEW RELEASE	HZF	09/27/2006	