
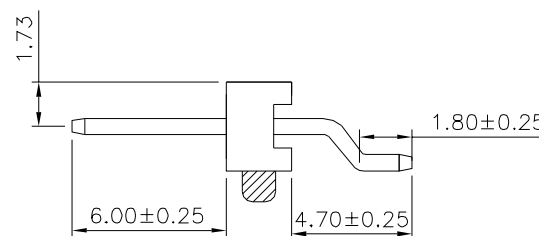
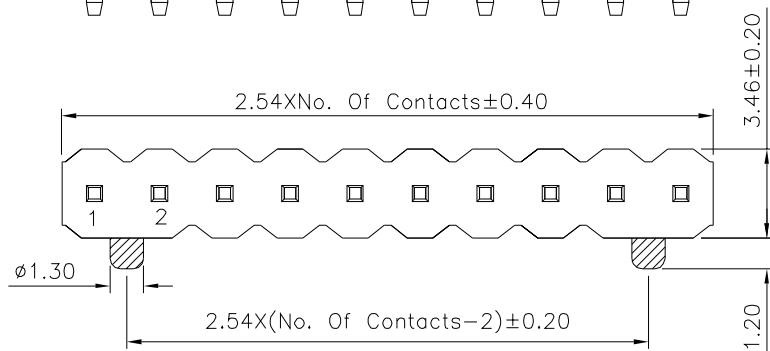
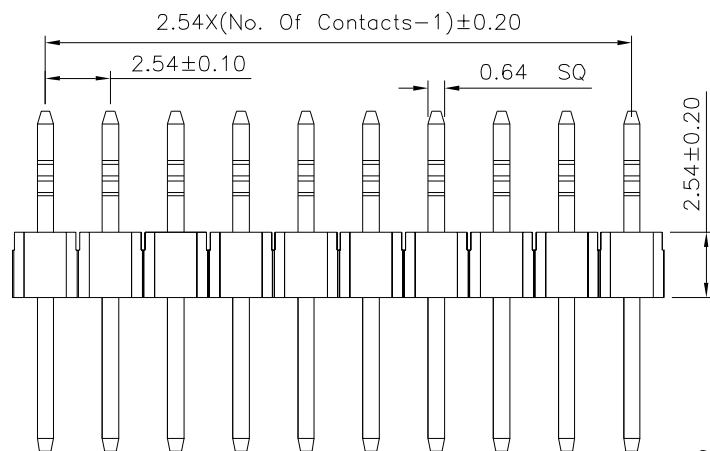
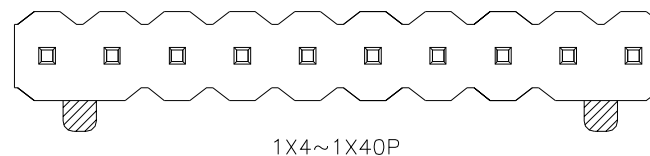




SPECIFICATION

Current:3A
 Withstanding Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:02~40 Contacts
 RoHS Compliant

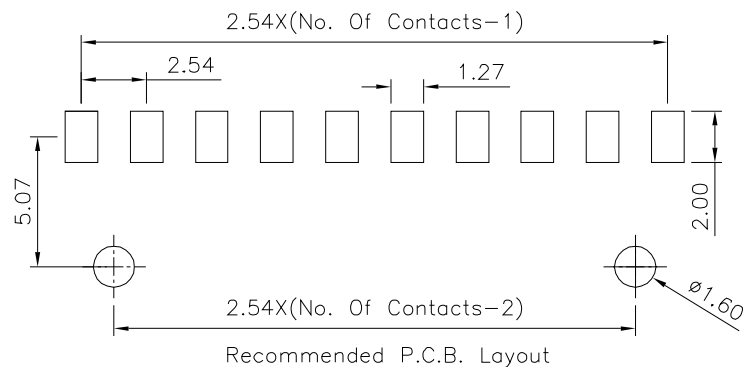

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

11050

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

B0

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 .XXX ±0.05

UNIT
 mm



NO. REV.

BO NEW RELEASE

REVISIONS

CHK

DATE

BO

NEW RELEASE

REVISIONS

CHK

DATE