
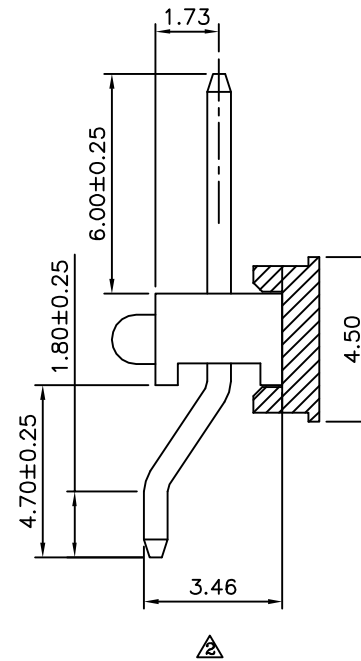
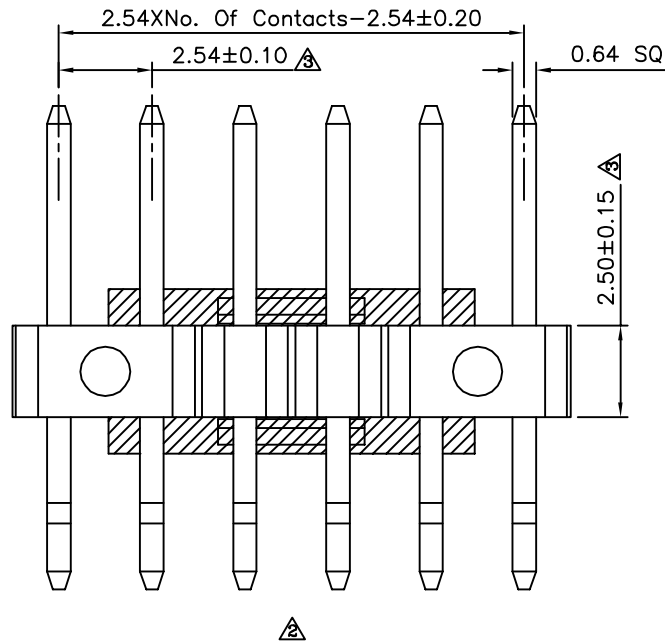
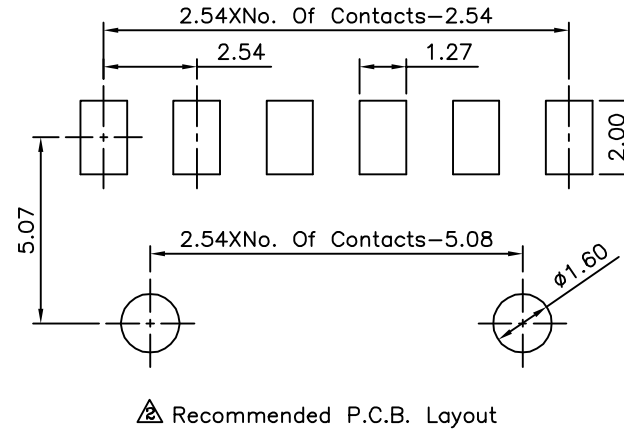


SPECIFICATION

Current:3A
 Withstanding Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 ⚠ Contact:Brass,Gold Flash Over Nickel
 ⚠ No. Of Contacts:03~40 Contacts
 RoHS Compliant

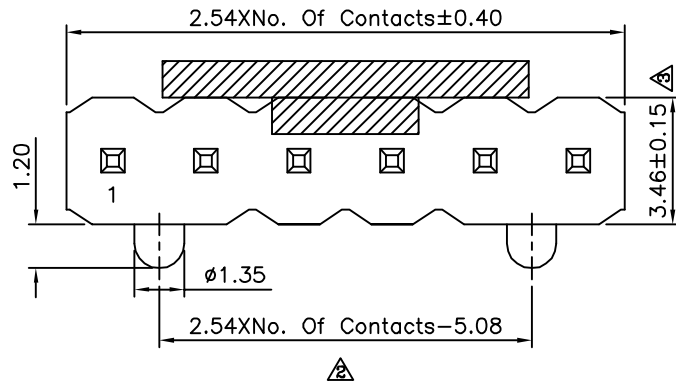

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

11106

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SONG

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

SCALE

NONE

REV.

A3

UNIT

mm

NO. REV.

REVISIONS

	A3	Modify Data	HZF	12/31/2013
	A2	Modify Data	HZF	12/13/2010
	A1	Modify Data	HZF	01/12/2009
	A0	NEW RELEASE	HZF	06/10/2008
NO	REV	REVISIONS	CHK	DATE