



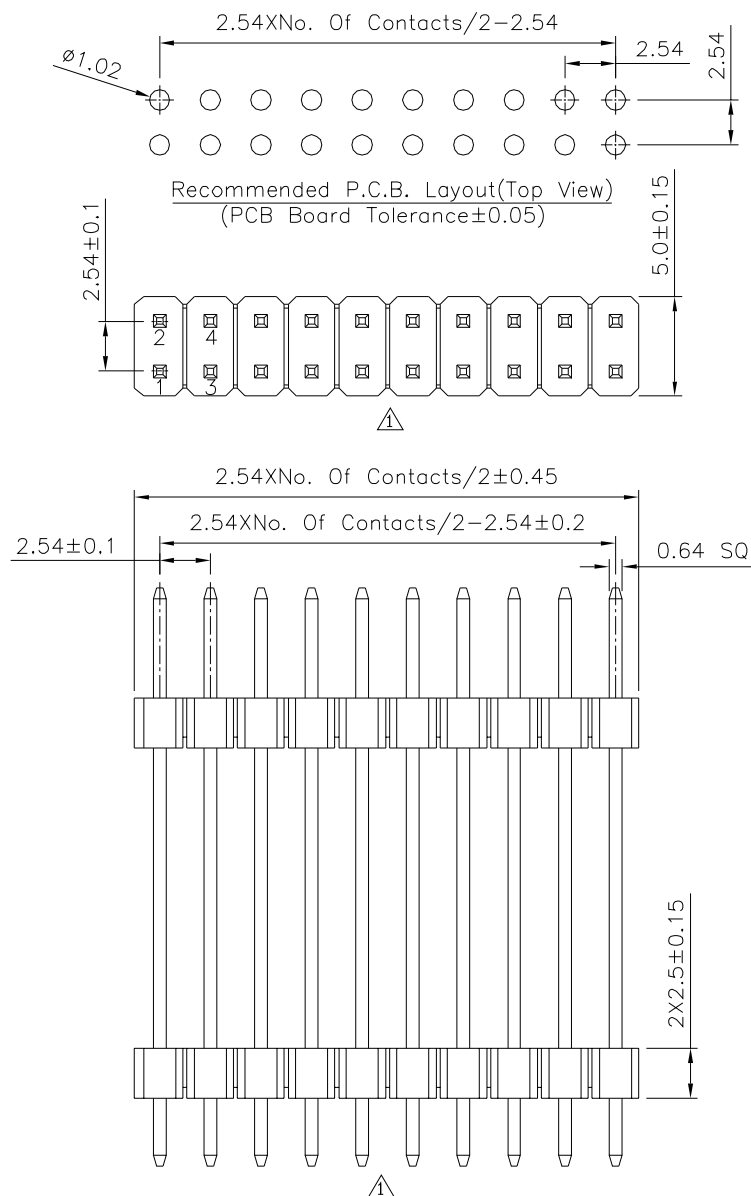

△ SPECIFICATION

Current Rating:3 Amps
Withstanding Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA9T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

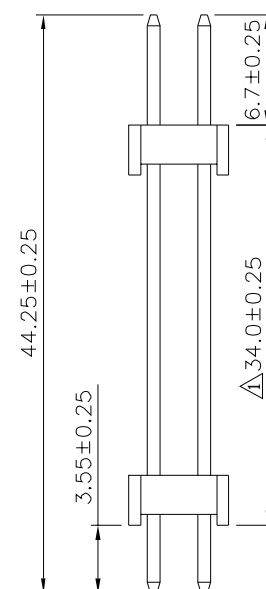

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

11109

SCALE	NONE
-------	------

NONE

APPROVED BY

EMILY

CHECKED BY	
------------	--

HZF


DRAWING BY

YBL

Y	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
---	---

X.	± 0.25	X.*	$\pm 2^\circ$
.X	± 0.20	.X*	$\pm 1.5^\circ$
.XX	± 0.15	.XX*	$\pm 1^\circ$
.XXX	± 0.10	.XXX*	$\pm 0.5^\circ$

UNIT	mm
------	----



5		
	1	A1

Modify Data

NEW RELEASES

	NEW RELEASE
W	REVIEW

SE

15

HZF	06/03/2023
-----	------------

H7F	08/22/2014
-----	------------

CHK	DATE
-----	------