File No.	182DL13233	SHEET	1/1

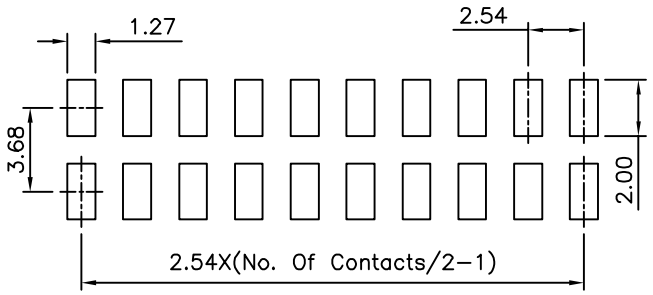

1 Recommended P.C.B Layout

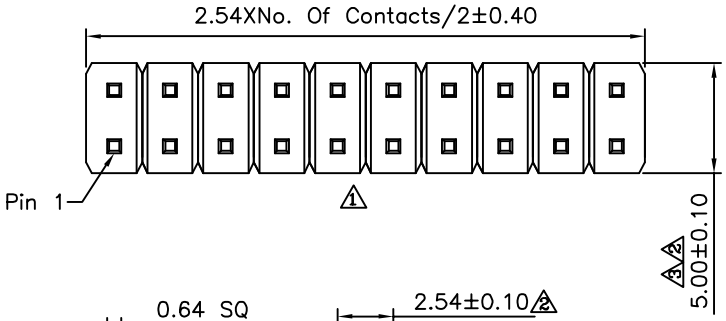

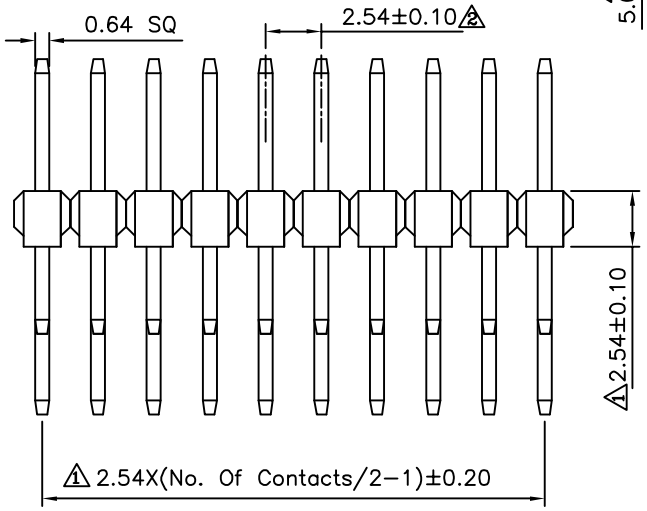

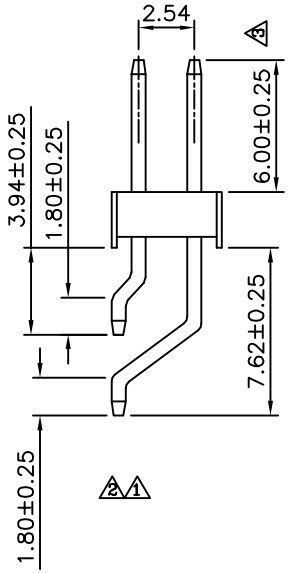

2 1 SPECIFICATION

Current:3A
Insulation Resistance:1000 Megaohms Min.
Withstanding Voltage:1000V AC RMS
Contact Resistance:20 Milliohms Max.
Operation Temperature:−55°C~+105°C
Housing:PA6T(UL94V−0),Black
3 Contact:Brass,Gold Flash Over Nickel
3 No. Of Contacts:04~80 Contacts
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
11143	EMILY	.X ±0.38
	CHECKED BY HZF	.XX ±0.25
	DRAWING BY YBL	ANG. ±5°
SCALE NONE	REV. A3	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
3	A3	Modify Data	HZF	12/13/2013
2	A2	Modify Data	HZF	04/02/2012
1	A1	Modify Data	HZF	01/26/2011
0	A0	NEW RELEASE	HZF	01/18/2007