

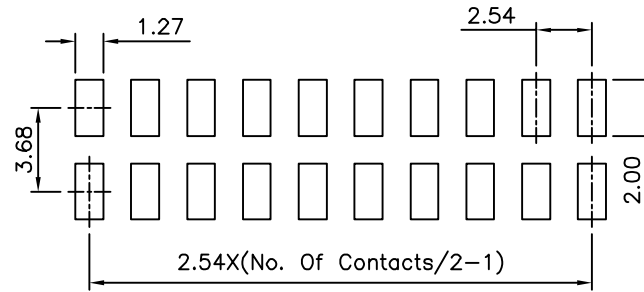
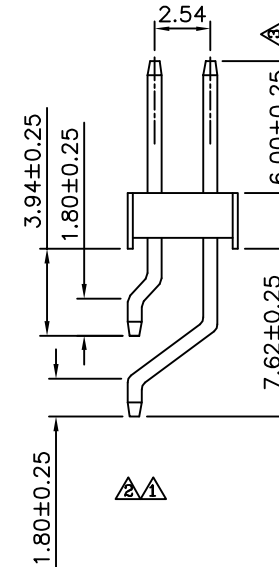


SPECIFICATION

Current:3A
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 No. Of Contacts:04~80 Contacts
 RoHS Compliant

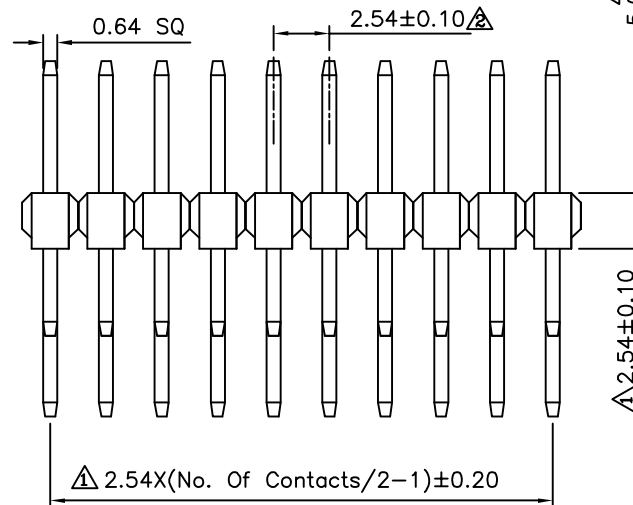

Recommended P.C.B Layout

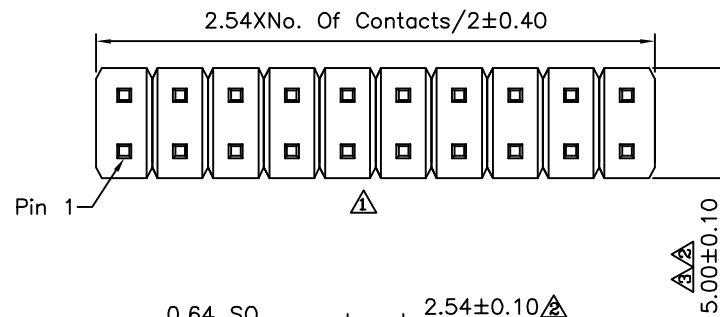

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

11147

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

UNIT

mm



NO.	REV.	REVISIONS	CHK	DATE
A3		Modify Data	HZF	12/13/2013
A2		Modify Data	HZF	04/02/2012
A1		Modify Data	HZF	01/26/2011
A0		NEW RELEASE	HZF	01/18/2007