
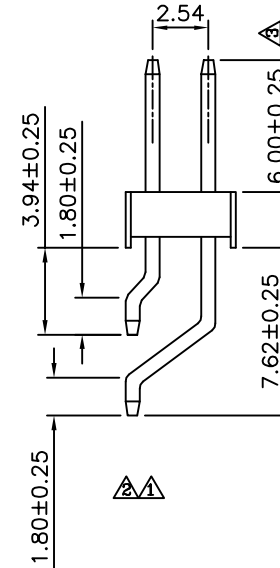
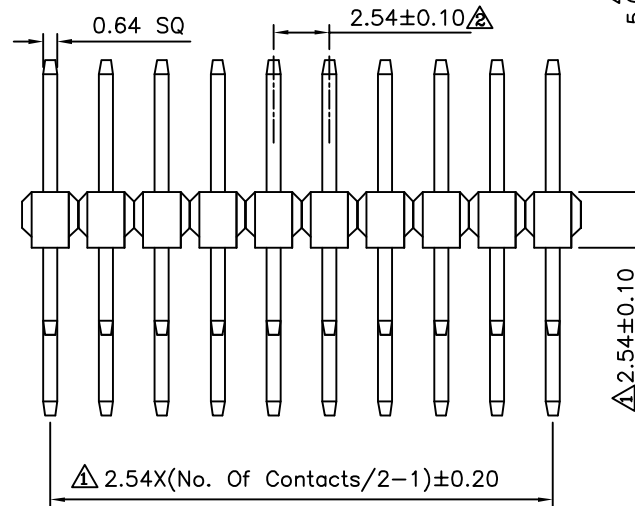


△ Recommended P.C.B Layout

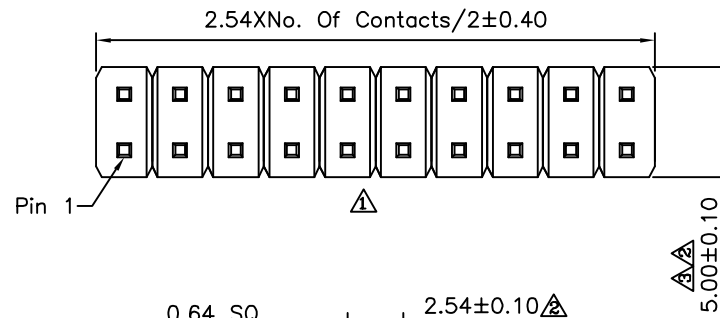

△△ SPECIFICATION

Current:3A
 Insulation Resistance:1000 Megaohms Min.
 Withstanding Voltage:1000V AC RMS
 Contact Resistance:20 Milliohms Max.
 Operation Temperature:-55°C~+105°C
 Housing:PA6T(UL94V-0),Black
 △ Contact:Brass,Gold Flash Over Nickel
 △ No. Of Contacts:04~80 Contacts
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

11170

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

YBL

REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG. ±5°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
△	A3	Modify Data	HZF	12/13/2013
△	A2	Modify Data	HZF	04/02/2012
△	A1	Modify Data	HZF	01/26/2011
△	A0	NEW RELEASE	HZF	01/18/2007